

Active geodetic network: application in topography

Enrique Cano-Jódar ^a, Manuel Sánchez-de la Orden ^b & Javier Mesas-Carrascosa ^b

^a Higher Technical School of Belmez, University of Córdoba, Córdoba, Spain. um1cajoe@uco.es

^b Higher Technical School of Agronomic Engineers of Córdoba, University of Córdoba, Spain. ig1saorm@uco.es, ig2mecaf@uco.es

Received: June 18th, 2017. Received in revised form: March 16th, 2018. Accepted: June 13th, 2018.

Abstract

The objective of this work is to determine the positional quality of the solutions offered by the Andalusia Positioning Network (RAP), an active geodetic network located in the autonomous community of Andalusia in southern Spain. Different tests are performed on the services offered by this active network, especially those that use real-time-Kinematic positioning techniques (RTK). Different parameters are analysed, including precision, accuracy and time of resolution of ambiguities. The system is then analysed from the perspective of the topographic survey; several small-scale topographic surveys are carried out, used for mining and civil engineering projects, with the aim of seeing if an active geodetic network can be used with performance similar to that for conventional RTK.

Keywords: CORS; RTK; RAP; topographical survey.

Red geodésica activa: aplicación en topografía

Resumen

El objetivo de este trabajo es determinar la calidad posicional de las soluciones ofrecidas por la Red de Andalucía de Posicionamiento (RAP). Red geodésica activa situada en la Comunidad Autónoma de Andalucía, en el sur de España. Se realizaron diferentes pruebas a los servicios ofrecidos por esta red activa, especialmente los que utilizan técnicas de posicionamiento en tiempo real (RTK). Se analizaron diferentes parámetros: precisión, exactitud y tiempo de resolución de ambigüedades. Posteriormente, se analizó el sistema desde el punto de vista del levantamiento topográfico, realizándose varios levantamientos de pequeña extensión, utilizados para proyectos de minería e ingeniería civil, con el objetivo de comprobar si una red geodésica activa puede utilizarse con un rendimiento similar a los obtenidos utilizando RTK convencional.

Palabras clave: CORS; RTK; RAP; levantamiento topográfico.

1. Introduction

Over recent years, Global Navigation Satellite Systems (GNSS) have seen major advances, closely related to the increase in the number of satellites and the improvement and development of signal processing algorithms. This has had a direct consequence on the widespread use of these technologies in different areas, mainly in the Engineering and primarily Civil Engineering.

In order to improve the quality metrics and services offered by GNSS systems, several GNSS networks have been installed, both private and public, offering download data services for post-process works and the sending of differential corrections, allowing for precise real time positioning. The scope of these networks can be global like

the International GNSS Service (IGS), continental such as the Euref Permanent Network in Europe, national such as the ERGNSS in Spain and local such as the Andalusia Positioning Network (RAP) in Andalusia.

Each of these, Continuously Operating Reference Stations (CORS) are comprised of a certain number of GNSS receivers, distributed homogeneously throughout the area in which it is intended to provide the service, a control centre where the data from said antennae is received a data distribution channel. Using the information received from all the antennae, the control centre determines and models the errors, creating corrections that are sent by the data distribution channel in order to improve the solution obtained in Real Time Kinematic (RTK). Since the 1990s, numerous studies have been carried out in this

How to cite: Cano-Jódar, E., Sánchez-de la Orden, M. and Mesas-Carrascosa, J., Active geodetic network: application in topography. DYNA, 85(206), pp. 114-120, September, 2018.

area, seeking to improve both the calculation methods and the sending of such corrections. [1]

Today there are different methodologies for calculating the transmission of the corrections based on the unidirectional or bidirectional nature of the communication. In the unidirectional link the user receives the correction directly. Such is the case of the Flächen Korrektur Parameter (FKP) corrections [2,3] and Master Auxiliary Concept (MAC) corrections [4]. With a bidirectional link it is necessary for the mobile receptor to send its approximate position to the control centre, generating the corrections appropriate for the mobile equipment. Such a concept is used for the following RTK architectures: Virtual Reference Station (VRS) [5] Individualized Master-Auxiliary (I-MAX) [6, 3] and Pseudo Reference Station (PRS) [7]. Today, these

methodologies are allowing for the application of GNSS technology in many areas, such as updating cartography, GIS inventories [8], fleet location and management [9], precision agriculture [10,11], mining applications [12]. Without doubt, this has meant a significant advance in the field of topography, optimising economic costs and improving farmland yields.

While it is important to improve these two factors, it is no less important to ascertain the positional quality obtained in the topographic surveys and stakeouts; fundamental aspects within the field of Civil engineering through compliance testing.

Many authors have studied the functioning and carried out different tests to verify the quality of the RTK service in a network of permanent reference stations. The tests are performed on a series of control points which are situated within the network. Some examples [13] carry out tests on the CORS Net network, which operates in New South Wales, Australia, analysing the difference between a conventional RTK solution and the focuses of the RTK network (NRTK) at different control points, in boundary conditions of distance between reference stations [14] These authors tested the precision of the position in six areas covering England and Wales using two commercial RTK network systems and comparing the coordinates obtained with the precise coordinates determined according to Bernese processing scientific GPS Software obtained through static methods. [15] Other authors perform the preliminary tests of a SmartNet research service from the point of view of the user for the purpose of assessing the quality of the NRTK service; various tests were carried out, applying static and cinematic methods using the same type of equipment as the SmartNet users in Great Britain.

[5] Other examples of RTK tests based on Active Networks have been applied previously, carrying out four simultaneous tests to evaluate RTK performance, using VRS, comparing the results for use of a simple solution and an NRTK solution (network solution) in the BLVA network in Germany.[16] They perform a systematic test that that has been carried out in different places in Shanghai to evaluate the accuracy and reliability that can be reached for VRS, RTK positioning. [17] The CORS GPS Network (GPS Net), created in Victoria (Australia) is

described. The evaluation tests for NRTK technologies were performed across extensive surface areas.

Other authors have even performed tests on the periphery of Active Networks that operate in border areas between neighbouring regions [18], performing tests on RTK positioning in three Active local GNSS networks at different testing points located in the border area between the Autonomous Communities of the Region of Murcia and the Valencian Community in the south-east of Spain.

Also, between Active Networks that operate in border areas between neighbouring countries [19] they perform tests of NRTK positions and post-process, simultaneously at different points located in border areas between Portugal and Andalusia, in the south west of the Iberian Peninsula. The analysis is based on the use of two active GNSS networks present in this border region, RENEP (Portugal) and RAP (Autonomous Community of Andalusia, Spain).

The Andalusia Positioning Network (RAP) is an active local network that operates in the Autonomous Community of Andalusia (Spain). It is comprised of 22 reference stations, distributed across the area it services. The approximate separation between stations is 50 to 70 km, as can be observed in Fig. 1.

It offers precision positioning services to be used both in post-process and in real time. It creates solutions based on the Master-Auxiliary Concept (MAC) [3,4], generating different types of differential corrections, from the nearest station or from a station selected in the standard format version 2.3 Radio Technical Commission for Maritime Services (RTCM) and differential corrections based on network solution in the standard format RTCM 3.1, sent through the Internet using the NTRIP protocol (RTCM network transport via Internet Protocol) [20].

The framework of reference is the international ITRF2000; it is made up of RAP stations, linked with the nearest stations belonging to the IGS, UREF or Active Geodetic Networks of a higher order. The calculation and adjustment process is carried out with Bernese 5.0 software developed by the Astronomic Institute of the University of Berna (Switzerland). A daily coordinate is obtained for each RAP station. These solutions are combined, making a least squares adjustment to obtain a weekly solution for each station. The final adjustment of the network is made by setting the IGS or EUREF stations for each period considered. [21].

In summary, the area of study proposed is within the Andalusia Positioning Network, in southern Spain and to the north of the province of Córdoba, as can be seen in Fig.2.

The methodology used is based on locating different control points and using the positioning services of the RAP, basically those that use differential corrections in real time and standard RTCM 2.3 format, from the nearest station to determine different parameters. First the tests to characterise the system are carried out, obtaining precision, accuracy and time to resolve the ambiguities. Subsequently the performance of the system is determined by completing topographic surveys.

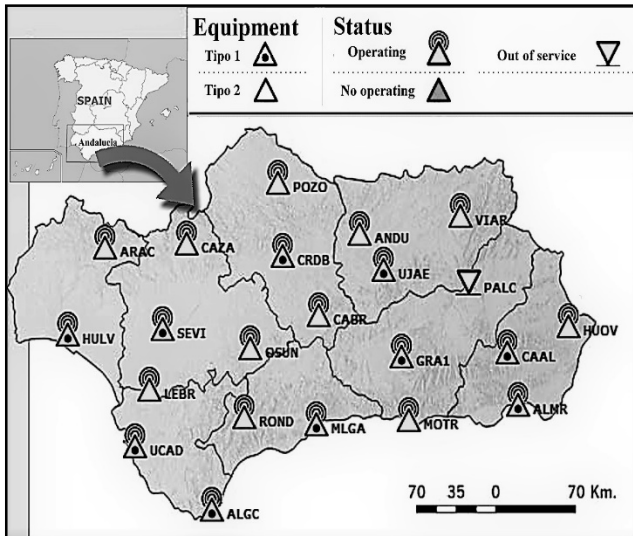


Figure 1. Continuously Operating Reference Stations (CORS) of the Andalusia Positioning Network. Source: authors' own and RAP.

2. Materials

To complete this work, the Andalusia Positioning Network is used, comprised of twenty two permanent GPS stations, of which 10 belong to first phase and consist of the following elements: choke ring geodetic antenna (Dorne-Margolin) Leica AT504 with Domo, Leica GRX1200 Pro double frequency receptors with four RS232 ports and an Ethernet port with three independent IP addresses, uninterrupted electrical feed system, permanent internet connection, weather station and two radio modems: PacifiCrest and Satellite 3AS.

The second phase stations do not have weather stations or radio modems and the geodetic antenna is not the choke ring type. For quality control and data processing, there is the control centre, software, whether scientific (Bernese, Gipsy, etc.) or commercial (Leica Geoffice, Trimble Geomatic office), etc.

The mobile equipment used for data capture is a GX1230 geodetic receiver with double frequency and the possibility of internet connection through GSM link. Siemens MC75, mobile phone integrated in a Leica GFU case, 850, 900, 1800, 1900 MHz, antenna GPS ATX 1220.

3. Methodology

Static and cinematic GPS methods are applied in real time RTK; services which are offered by RAP are applied especially to those that use the positioning techniques using differential corrections in real time (RTK). The parameters to evaluate are: precision, accuracy and performance in the topographic study.

3.1. Precision

Precision allows for the dispersion of the data obtained to be determined, establishing the most probable value for a measured magnitude. The value of said magnitude shall be

obtained from the observations made, which suggests an oversized number of repetitions in the measurement process. The measurements will never be exact as there is a series of factors that influence this process; the directions themselves, the instrumentation used, external factors, etc.

When using the GNSS network, this parameter will depend on the different variables, such as the number of satellites, geometry of the constellation, time of observation, precision of the ephemeris used, local effects such as multipath, corrections generated by the system, distance of reference stations, etc.

Other errors, such as ionospheric and tropospheric activity are not controllable. However, the distance between reference stations conditions the dependence of the network with respect to these factors.

Precision is determined numerically by the standard deviation of the measurements collected. To determine the precision of the system, a series of control points are installed on the hard shoulder of several roads in the north of the province of Córdoba, as can be seen in Fig. 2. These points are steel spokes which allow for the data to be taken at the same time and are manufactured so that they can remain stable during the observations. There are six such control points, distributed in groups of three, at an approximate distance of 30 to 40 kilometres respectively from the permanent reference point located in Pozoblanco, Córdoba, belonging to the Andalusia Positioning Network. The data gathering is carried out in real time RTK, configuring the mobile equipment with MAC methodology [3,4] providing differential corrections corresponding to the nearest station in the standard RTCM 2.3 format which are sent through the NTRIP protocol by internet.

To avail of sufficient data in each control point, three different series have been taken and in each series sixty repetitions were made; each data series was taken in different weeks to prevent the collected data from exhibiting a strong temporal correlation (environmental conditions, GNSS constellation configuration, etc.).

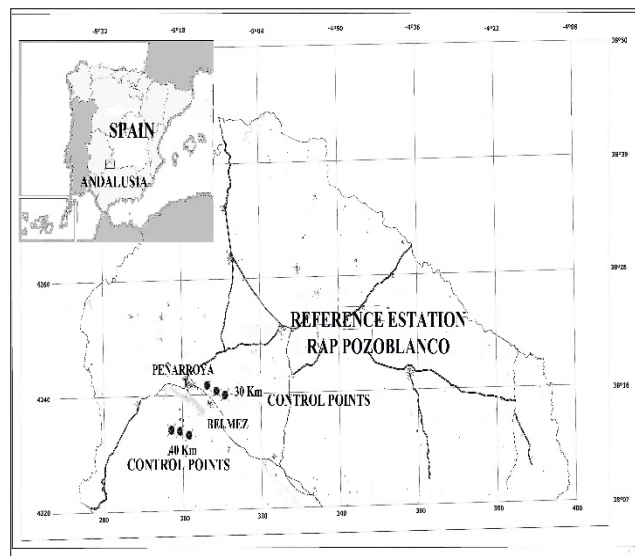


Figure 2. Control points situation. Source: Authors' own.

3.2. Accuracy

The accuracy of the data offered by the RAP is verified by comparing the coordinates obtained by the mobile receptor in real time RTK, configuring and using MAC architecture with the coordinates of six control points obtained with more precise methods. The coordinates of these control points have been determined through a static survey, with an observation time of approximately sixty minutes at each point. The accuracy obtained in the coordinates will depend, in this case, on the observation time at each point. Once the mobile equipment file is obtained, the corresponding file for the Pozoblanco reference antenna is downloaded from the RAP FTP for the day and time of the mobile observation.

Using Leica Geo Office commercial software, the control point coordinates are calculated in post-process. In general, the parameters used in the post-process are: angle of elevation 15°, type of ephemeris transmitted, type of automatic solution and type of automatic GNSS.

The strategy used is: automatic frequency, set ambiguities up to 80 km, minimum duration for floating solution 300 seconds, sample interval: use all the observations made, Hopfiel tropospheric model, automatic ionospheric model, minimum distance 8 km and automatic ionospheric activity.

To check the deviation of the coordinates obtained by the receiver three series of measurements are taken at different times, taking 60 data in each series. The solution used is that generated by the RAP applying the MAC concept, differential corrections from the nearest station, transmitted in RTCM 2.3 MESSAGES format, through NTRIP [3,4]. The coordinates obtained in real time RTK compared to the coordinates of the control points obtained with the upper range static precision method will allow for the standard deviation to be obtained and thus to establish the accuracy or veracity of the system.

3.3. Ambiguity resolution time

The time a piece of equipment needs to resolve ambiguities depends on a number of factors that can be difficult to determine a priori, such as: distance from the base station, number of satellites observed, algorithm used by the manufacturer, possible loss of cycle during the calculation process, etc.

On this point it is intended to evaluate how much time a field operator needs to take the sample of a determined point. Firstly, the time the receiver takes to achieve a precise positioning is measured and secondly the time taken by the system to recover and the precision after a data loss and the resulting loss of phase.

The first point can be measured easily; it is only necessary to initiate the equipment and measure the time needed to obtain the desired precision. The latter will depend on whether there is an outage in the system, a data loss and loss of phase solution and from this moment measure the time taken to achieve the necessary precision.

In each series, the time a piece of equipment needs to start up has been measured, as has the time taken to connect to the

control centre and to obtain the precise position. The recovery time can only be measured if there is a data crash and this is when the recovery time is noted.

3.4. Surveys carried out

The system is analysed from the perspective of a topographic survey, comparing the performance obtained with the classic surveys. For this, several small extension surveys have been carried out, used for different Engineering and Mining projects: surveys of properties, roads, motorways, etc.

Approximately two thousand points have been taken with mean quality of 0.0494m. The method used is in real time (RTK), using the differential correction solution (MAC) from the nearest station, RTCM 2.3 format.

4. Data Analysis

4.1. Precision

The coordinates taken as reference to determine precision are obtained from the filed measurements themselves, determining the most probable value as the average of the measures taken.

Three series of measures are taken at each control point, where 60 repetitions are made. Different statistical tests are applied and the errors are represented to see if they follow a normal distribution.

Table 1 shows the discrepancies in the East, North and Vertical components with respect to the most probable value assigned to each control point.

Table 2 shows the standard deviations σ_E , σ_N , σ_U of the East, North and Vertical components for the three series obtained at each control point, and the average value obtained at the points located 30 and 40 km from the reference station. The results obtained are similar, although the control points are at different distances from the reference station.

Table 1. Discrepancies with respect to the most probable value.

	Series	dE	dN	dU	dE Mean	dN Mean	dU Mean
1	1	0.004	0.005	0.008			
	2	0.005	0.003	0.006	0.005	0.004	0.006
	3	0.005	0.004	0.005			
2	1	0.004	0.004	0.006			
	2	0.005	0.003	0.006	0.005	0.004	0.007
	3	0.005	0.004	0.008			
3	1	0.004	0.006	0.010			
	2	0.004	0.004	0.005	0.004	0.005	0.008
	3	0.004	0.004	0.008			
4	1	0.005	0.006	0.007			
	2	0.003	0.004	0.006	0.004	0.005	0.007
	3	0.005	0.005	0.007			
5	1	0.007	0.004	0.007			
	2	0.004	0.004	0.011	0.006	0.004	0.008
	3	0.006	0.004	0.007			
6	1	0.005	0.004	0.010			
	2	0.005	0.004	0.012	0.005	0.005	0.011
	3	0.004	0.006	0.010			

Source: Authors' own.

Table 2.
RTK Precision. RAP Solutions.

Control Point	Series	σE	σN	σU	σE Mean	σN Mean	σU Mean
1	1	0.005	0.007	0.010			
	2	0.006	0.005	0.008	0.006	0.006	0.008
	3	0.007	0.005	0.007			
2	1	0.007	0.006	0.011			
	2	0.006	0.005	0.008	0.007	0.005	0.009
	3	0.007	0.005	0.007			
3	1	0.007	0.005	0.008			
	2	0.005	0.005	0.006	0.006	0.005	0.008
	3	0.006	0.005	0.010			
4	1	0.007	0.007	0.008			
	2	0.004	0.005	0.008	0.006	0.006	0.008
	3	0.006	0.006	0.009			
5	1	0.009	0.006	0.009			
	2	0.005	0.005	0.013	0.007	0.005	0.010
	3	0.007	0.005	0.009			
6	1	0.006	0.008	0.013			
	2	0.006	0.005	0.014	0.006	0.007	0.013
	3	0.006	0.008	0.013			

Source: Authors' own.

Table 3.
Accuracy RTK

Control Point	Accuracy. (m)	RTK SOLUTION				Mean value
		Series 1	Series 2	Series 3		
1	H	0.012	0.015	0.011	0.013	
	V	0.011	0.014	0.015	0.013	
2	H	0.019	0.016	0.008	0.014	
	V	0.011	0.007	0.021	0.013	
3	H	0.028	0.008	0.008	0.015	
	V	0.025	0.019	0.013	0.019	
4	H	0.018	0.014	0.014	0.015	
	V	0.013	0.009	0.010	0.011	
5	H	0.012	0.007	0.019	0.013	
	V	0.009	0.017	0.034	0.020	
6	H	0.015	0.021	0.019	0.018	
	V	0.022	0.015	0.023	0.020	

Source: Authors' own.

For all the points located 30 to 40 kilometres from the reference station, the mean precision values for the component East, North and Vertical can be observed in Table 2. The variation in precision for the East component ranges between (0.006 - 0.007) m, for the North component, the ranges between (0.005 - 0.007) m and for the vertical component between (0.008 - 0.013) m,

4.2. Accuracy

Accuracy is determined by comparing the coordinates obtained in real time by the mobile equipment with the control points located approximately 30 to 40 km from the nearest reference station, Pozoblanco, of the Andalusia Positioning Network and at the same time shall depend on the coordinates assigned for these control points. The method used to obtain the coordinates of the control points is to perform an autonomous or static positioning and subsequently a post-process with commercial Leica Geo office software.

Table 3 shows the control points, the horizontal and vertical components, the accuracy of each component in the

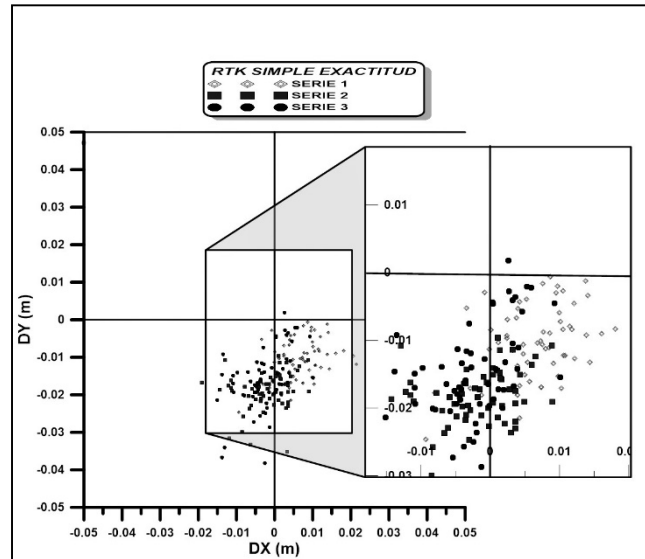


Figure 3. Horizontal discrepancy with respect to the post-process solution and RTK solutions of the RAP for control points 4.
Source: Authors' own.

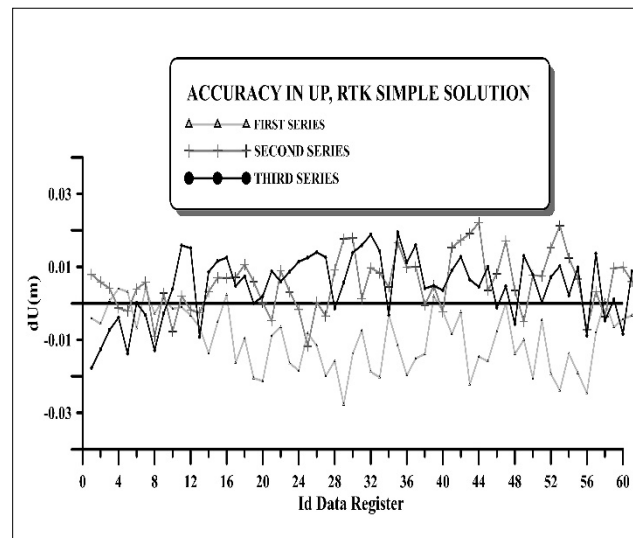


Figure 4. Vertical discrepancy with respect to the post-process solution and RTK solutions of the RAP for control points 4.
Source: Authors' own.

three series of measurements taken and the average value for each component.

The variation in accuracy ranges between (0.013 - 0.018) m and (0.011 - 0.020) for the horizontal and vertical components respectively.

4.3. Ambiguity resolution time

As observed in Fig. 5, the equipment used for performing this work needs an average of 51'' to initialise and receive the signal from the constellation, 21'' to connect with the control centre of the network and to have precision to complete observations and some 12'' to recover precision when it loses a fixed solution.

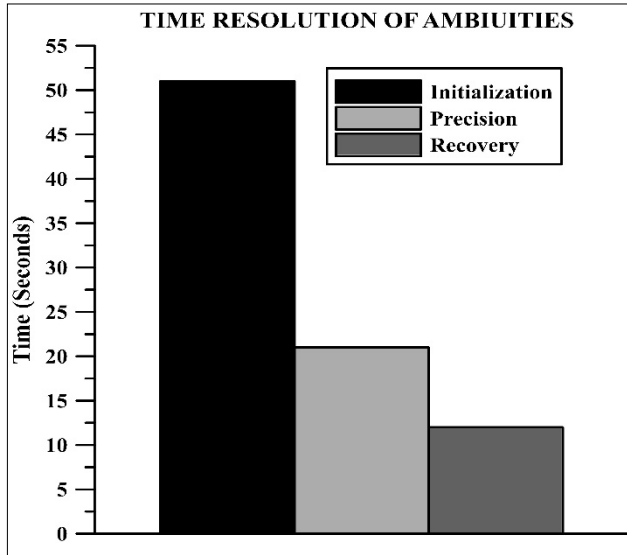


Figure 5. Ambiguity resolution
Source: Authors' own.

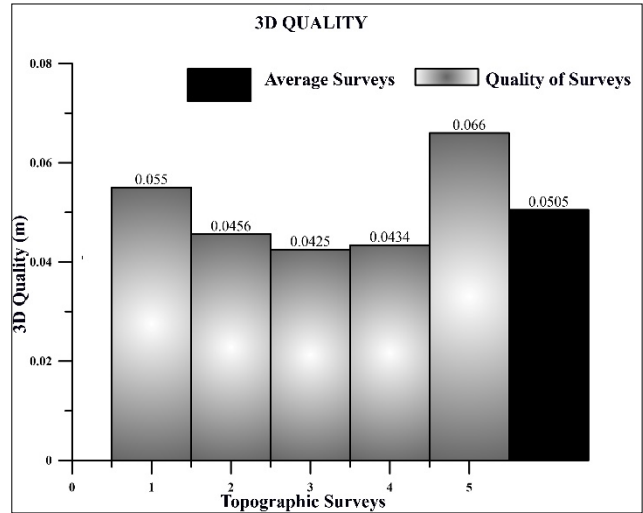


Figure 7. Performance of surveys and 3D quality.
Source: Authors' own.

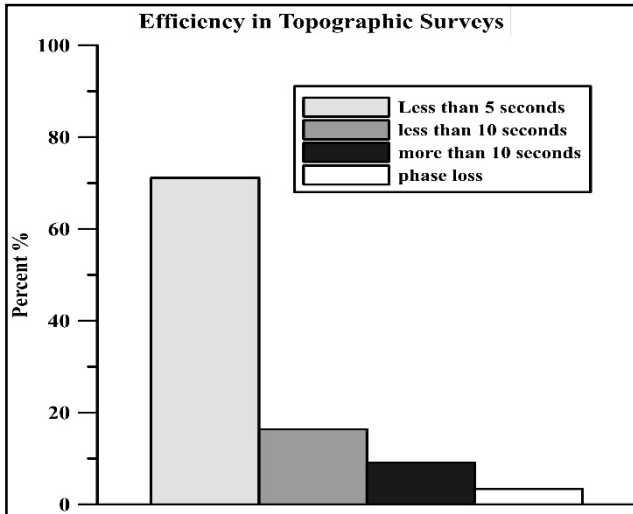


Figure 6. Survey performance
Source: Authors' own

4.4. Survey performance

At this point, the performance of the system is analysed when the topographic survey is carried out. Once the range of the precision and accuracy values is known, the survey is

analysed as a whole: time for sampling a point, quality and outages in the system, errors with coordinates of the points sampled.

Analysing the data for observation times and coordinates of all the surveys carried out, the percentage of points that take a determined time and the average quality of the sampling of all the points can be obtained.

In Fig. 6 the percentage of points that take less than five seconds, less than ten seconds and more than ten seconds can be observed, along with that corresponding to the loss of data with the consequent loss of phase and solution.

In Fig. 7, the different surveys are shown on the abscissa axis and the ordinate axis shows the quality in position and height at which the points of all topographic surveys were sampled.

5. Conclusions.

In this work, the services offered by RAP (Andalusia Positioning Network), an Active Local Network located in the Autonomous Community of Andalusia in southern of Spain have been evaluated.

It has been possible to show that the precision and ambiguity resolution times obtained using the permanent GNSS network are similar to those obtained using conventional RTK. The average precision values obtained for the different control points of the East, North and Vertical components are (0.006 - 0,006 - 0,009) m. respectively, Position (3D) 0.012m

If we compare the static method used to obtain the coordinates assigned to the control points, with sampling in (RTK), the accuracy reached in determining said coordinates is high, even though it would probably have been necessary to take a larger number of measurements. The average accuracy values for the six control points, in the horizontal and vertical components are: (0.015 - 0.016) m, respectively. Position (3D) 0.022 m.

The system shows good stability and provides homogeneous solutions, even though the data has been taken at different times and obtained from different reference stations.

In terms of the topographic survey, it is verified that use of an Active Geodetic Network of permanent stations operating continuously is adequate for use in topographic and engineering projects. It offers excellent performance in data sampling, in the acquisition time of same, in the quality of the system and in the processing of data.

References

[1] Rizos, C. and Han, S., Reference station network based RTK System - Concepts & Progress, in 4TH International Symposium on

- GPS/GNSS, presented at 4th International Symposium ON GPS/GNSS, Wuhan, China, 6–8 November, 2002.
- [2] Wübbena, G., Bagge, A. and Schmitz, M., RTK networks based on Geo+GNSMART concepts, implementation, results, www.geopp.de, in: International Technical Meeting, IONGPS-01, September 11–14, 2001.
- [3] Janssen, V., A comparison of the VRS and MAC principles for network RTK. Proceedings of the IGNS Symposium. Australia, Dec 2009.
- [4] Euler, H.J., Keenan, C.R., Zebhauser, C.B. and Wübbena, G., Study of simplified approach in utilizing information from permanent reference station arrays, presented at ION GPS, 2001.
- [5] Landau, H., Vollath, U. and Chen, X., Virtual reference station systems, *Journal of Global Positioning Systems*, 1(2), pp. 137-143, 2002.
- [6] Brown, N., Keenan, R., Richter, B. and Troyer, L., Advances in ambiguity resolution for RTK applications using the new RTCM V3.0, Master-Auxiliary messages Leica Geosystems AG, Switzerland Published in proceedings of ION GNSS, Long Beach, CA, September 13-16, 2005.
- [7] Wübbena, G., Bagge, A. and Schmitz, M., GNSMART irregularity readings for distance dependent errors, White Paper. July, 2004.
- [8] Colombo, O., Brunner, S., Jones, G., Janssen, V. and Rizos, C., Wide-area, sub-decimeter positioning for airborne LiDAR surveys using CORSnet-NSW, in: Proceedings of XXIV FIG International Congress: Facing the Challenges - Building the Capacity, 11-16 April, Sydney, Australia, 2010, pp. 1-20.
- [9] Huang, Z., Huang, D., Xu, Z., et al, 3rd International Conference on Environmental Science and Information Application Technology ESAT 2011, PTC, Book Series: Procedia Environmental Sciences, Part: C, 10, pp. 2498-2504, 2011.
- [10] Liu, Z. and Xiong, W., Design of precision fertilization management information system on GPS and GIS, Technologies computer and computing technologies in agriculture PT I, Book series: IFIP, 368, pp. 268-277, 2012.
- [11] Freeland, R.S., Buschermohle, M.J., Wilkerson, J.B. and Pierce, J.C., Precision agriculture-assessing virtual and single reference stations, *Applied Engineering in Agriculture*, 28(6), pp. 913-922, 2012.
- [12] Gao, J.-X. and Hu, H., Advanced GNSS technology of mining deformation monitoring. Proceedings of the International Conference on Mining Science & Technology (ICMST2009), Book Series: Procedia Earth and Planetary Science, 1(2009), 2009, pp. 1081-1088. DOI: 10.1016/j.proeps.2009.09.166
- [13] Janssen, V. and Haasdyk, J, Assessment of network RTK performance using CORSnet-NSW, in: Proceedings of the IGNS Symposium, Sydney, Australia, 15–17 November, 2011.
- [14] Edwards, S.J., Clarke, P.J., Penna, N.T. and Goebell, S., An examination of network RTK GPS services in great Britain, *Survey Review*, 42(316), pp. 107-121, 2010. DOI: 10.1179/003962610X12572516251529
- [15] Aponte, J., Meng, X., Dodson, A.H., Moore, T., Hill, C. and Burbidge, M., Quality assessment for a network RTK GPS service in the UK, *J. Appl. Geodesy*, 3, pp. 25-34, 2009.
- [16] Lou, L. and Chen, Y., The precision and accuracy of Shanghai Vs network, in: *Observing our Changing Earth*, Springer Berlin Heidelberg, 2009, pp. 719-723.
- [17] Gordini, C., Kealy, A.N., Grgich, P.M., Hale, M.J. and Gordini, C., Testing and evaluation of a GPS CORS network for real time centimetric positioning–The Victoria GPSnet, in: Proceedings of the IGNS2006 Symposium, 2006, pp. 17-21.
- [18] Garrido, M.S., Giménez, E., de Lacy, M.C. and Gil, A.J., Surveying at the limits of local RTK networks: test results from the perspective of high accuracy users. *International Journal of Applied Earth Observation and Geoinformation*, 13(2), pp. 256-264, 2011. DOI: 10.1016/j.jag.2010.12.001.
- [19] Garrido, M.S., Giménez, E., Armenteros, J.A., Lacy, M.C. and Gil, A.J., Evaluation of NRTK positioning using the RENEP and RAP networks on the southern border region of Portugal and Spain. *Acta Geodaetica et Geophysica Hungarica*, 47(1), pp. 52-65, 2012
- [20] Lenz, E., Networked transport of RTCM via internet protocol (NTRIP) – application and benefit in modern surveying systems, FIG Working Week, Athens, Greece, May 22-27, 2004. Int. paper TS3.2
- [21] Berrocoso, M., Páez, R., Jigena, B. and Caturla, C., The RAP net: a geodetic positioning network for Andalusia (south Spain). Riga, Latvia, June 14-17 2006, EUREF Publication No. 16, *Mitteilungen des Bundesamtes für Kartographie und Geodäsie*, Band 40, pp. 364-368. ICA-UCA.2007

E. Cano-Jódar, is BSc. in Technical Mining Engineer specialised in exploitation of Mines. From 1983 to 1992 he worked for the private company Ferrovial S.A. dedicated to Civil Engineering construction. Civil Servant assigned full time to the corps of Senior University Lecturers, Group A; administrative status: active, by contest; appointment date 07/04/1995. Year 1994/1995, current post. He lectures at the University of Córdoba, Spain, in the Higher Technical School of Belmez, in the degree programmes in civil engineering and energy resources and mining. In 2009 he completed the MSc. in Design and Management of Agro-Industrial Plants. Principal areas of research: active geodetic networks: applications in mining and civil engineering; active geodetic networks: quality control positioning of linear elements; topography; mining cartography and photogrammetry. Coordinator of the degree energy resources and mining, Coordinator of the master in mining engineering. ORCID. 0000-0002-5036-5564.

M.Sánchez-de la Orden, is university professor in the area of cartographic engineering, geodesy and photogrammetry at the department of graphic and geomatic engineering at the University of Córdoba, Spain. Areas of research: geomatic applications and new sensors (LIDAR air, terrestrial and mobility) for management of agro-forestry and natural resource, teledetection in precision agriculture, photogrammetry applications with unmanned platforms. He has published papers in the international journals *Plant & Soil*, *Weed Science*, *Agriculture, Ecosystems and Environment*, *Agronomy for Sustainable Development*, *Computers and Electronics in Agriculture*, and *Forest Systems*. Management and participation in R&D Projects financed by public tender. ORCID. 0000-0001-9262-5523

F.J. Mesas-Carrascosa, is BSc. in Eng. in Geodesy and Cartography since 1999, and holds a Dr. in Engineering from the University of Córdoba, Spain awarded in the year 2012. Contracted doctorate professor at the University of Córdoba at the Higher Technical School of Agronomic Engineers. In 2009 he participated as lecturer on a number of Master programmes of the University of Córdoba and the University of Jaén, both in Spain, such as the master in evaluation and management of geographic information or the master in geomatics, teledetection and spatial models applied to forestry management and is currently the co-director of same. He worked as an external consultant for public and private companies from the year 2000 to 2012. His lines of research are those relating to the application of UAV platforms in the energy, agroforestry, civil engineering and heritages sectors as well as the development of applications for mobile devices and the exploitation of open-source sensors and platforms. ORCID 0000-0002-5674-1292