

# Biorefinery Concept Applied to Phytochemical Extraction and Bio-Syngas Production using Agro-Industrial Waste Biomass: A Review

## Concepto de biorrefinería aplicado a la extracción fitoquímica y producción de bio-singas usando biomasa de residuos agro-industriales: una revisión

Carlos Esteban Aristizábal-Alzate<sup>1</sup>, Pedro Nel Alvarado<sup>2</sup>, and Andrés Felipe Vargas<sup>3</sup>

### ABSTRACT

Second-generation biomass is a renewable resource that can address the increasing global energy demand and help to partially substitute the use of and dependence on fossil fuels, since it can be transformed into gas, liquid and/or solid fuels by physical, thermal, thermochemical and/or biological processes. However, its potential is not fully exploited because the process to extract the phytochemicals present in such organic byproducts has been largely omitted. Natural compounds are of interest to high value-added industries such as cosmetics and pharmaceuticals. Therefore, this work proposes to thoroughly use such residual biomass in a biorefinery by a simultaneous, efficient and sustainable integration and operation of extraction processes to obtain phytochemicals and functional extracts. A thermochemical process known as gasification is implemented to produce syngas, which can be turned into fuels, chemicals, and energy such as methanol and synthetic gasoline. Furthermore, this review article describes the state of the art of each process and the concept of biorefinery.

**Keywords:** biorefinery, waste biomass, thermochemical conversion, bio-syngas, phytochemical extraction

### RESUMEN

La biomasa de segunda generación es un recurso renovable que puede abordar la creciente demanda mundial de energía y ayudar a sustituir parcialmente el uso y la dependencia de los combustibles fósiles, ya que puede transformarse en gas, líquidos y/o combustibles sólidos por medio de procesos físicos, térmicos, termoquímicos y/o biológicos. Sin embargo, su potencial no se explota completamente porque no se considera el proceso de extracción de los fitoquímicos presentes en dichos subproductos orgánicos. Los compuestos naturales son de interés para las industrias de alto valor agregado como la cosmética y la farmacéutica. Por lo tanto, este trabajo propone utilizar a fondo dicha biomasa residual en una biorrefinería mediante una integración y operación simultánea, eficiente y sostenible de los procesos de extracción para obtener fitoquímicos y extractos funcionales. Se implementa un proceso termoquímico conocido como gasificación para producir gas de síntesis, que puede convertirse en combustibles, productos químicos y energía tales como metanol y gasolinas sintéticas. Además, este artículo de revisión describe el estado del arte de cada proceso y el concepto de biorrefinería.

**Palabras clave:** biorrefinería, biomasa residual, conversión termoquímica, syngas, extracción fitoquímica

**Received:** September 29th, 2019

**Accepted:** July 6th, 2020

### Introduction

Nowadays, first-generation biomass is commonly used to obtain biofuels in order to address the increasing global energy demand and partially substitute fossil fuels. For example, vegetable oils from oil palm plantations or rapeseed in Europe are employed to produce biodiesel, and plants rich in fermentable sugars such as corn, cereals, and sugarcane are processed to produce bioethanol (Jin, Yang, Poe, and Huang, 2018; Kajaste, 2014; Ubando, Felix, and Chen, 2020). However, the exploitation of this type of biomass entails a problem, since it competes for the use of land and, in traditional agriculture, these products are feedstock, which increases and volatilizes their price (Damartzis and Zabaniotou, 2011; Lapkin et al., 2014). Besides, we live in an era of human dominance that has altered biogeochemical carbon, nitrogen, phosphorus, and water cycles (Carey,

<sup>1</sup>Chemical, Engineer, Universidad Nacional de Colombia, Colombia. M.Sc Industrial Energy Management. Grupo de Investigación en Química Básica, Aplicada y Ambiente (ALQUIMIA), Instituto Tecnológico Metropolitano de Medellín, Colombia. Affiliation: Cathedric Professor, Instituto Tecnológico Metropolitano de Medellín, Colombia. E-mail: carlosaristizabal207157@correo.itm.edu.co

<sup>2</sup>Chemist, Universidad de Antioquia, Colombia. Ph. D Chemist, Universidad de Antioquia Colombia. Affiliation: Facultad de Ingeniería, Grupo de Investigación en Materiales Avanzados y Energía (MATyER), Instituto Tecnológico Metropolitano de Medellín, Colombia. E-mail: pedroalvarado@itm.edu.co

<sup>3</sup>Chemist, Universidad de Antioquia, Colombia. Ph.D Chemist, Universidad de Antioquia, Colombia. Affiliation: Facultad de Ciencias Exactas y Aplicadas, Grupo de Investigación en Química Básica, Aplicada y Ambiente (ALQUIMIA), Instituto Tecnológico Metropolitano de Medellín, Colombia. E-mail: andresvargas@itm.edu.co

**How to cite:** Aristizábal-Alzate, C. E., Alvarado, P. N., and Vargas, A. F. (2020). Biorefinery Concept Applied to Phytochemical Extraction and Bio-Syngas Production using Agro-Industrial Waste Biomass: A Review. *Ingeniería e Investigación*, 40(2), 22-36. 10.15446/ing.investig.v40n2.82539



Attribution 4.0 International (CC BY 4.0) Share - Adapt

Yang, McNamara, and Mayer, 2016) and affected agricultural productivity, as well as the quality and fertility of the soil.

The most widely-recommended raw material to produce different types of high value-added products is second-generation biomass (2G). These include the more affordable and widely available lignocellulosic residues from agro-industrial activities. If 2G is not valorized, it will often be disposed of in sanitary landfills, used like a low quality fuel, or returned to the field as a fertilizer (Löffler et al., 2010; Zondervan, Nawaz, de Haan, Woodley, and Gani, 2011). As a result, the production costs of fuels and/or chemicals obtained from it are lower than those from first-generation biomass or energy crops (Bentsen, Felby, and Thorsen, 2014; Damartzis and Zabaniotou, 2011; Demirbas, 2010a; Ekman, Wallberg, Joelsson, and Börjesson, 2013). Additionally, this type of biomass does not have the same problems of its first-generation counterpart, since it is nonedible (Ubando et al., 2020).

This type of recovery is carried out at facilities known as biorefineries, which provide a conversion process with different products (energy, food/fodder, materials, chemicals, etc.) with ideally zero waste production (Carey et al., 2016; Martinez, Kok, and Ng, 2018; Ubando et al., 2020). This enables the recovery of nutrients to produce fertilizers by extracting high value-added phytochemicals (e.g., caffeine, polyphenols, and saponins, etc.) (Carey et al., 2016; Esquivel and Jiménez, 2012; Murthy and Madhava Naidu, 2012). Such waste is later used as a source of electrical energy, fuel, and/or chemicals in general (methanol) by means of a thermochemical treatment (gasification). In Colombia, a few industries have adopted this concept and recover this type of active or functional principles because their content in vegetable raw material is relatively low (Lapkin et al., 2014). Furthermore, if the energy in second-generation biomass, which is not efficiently recovered to make other functional products, given that it is generally employed as fertilizer or low-quality fuel (Bilhat Chala, Sajid Latif, 2015; Lapkin et al., 2014; Salinas Rios et al., 2014; Torres-Mancera et al., 2011), all its potential for adding value is wasted and it becomes an environmental issue (Hughes et al., 2014).


However, this type of facilities has to be studied in more detail, because the biomass supply chain could be noncontinuous and stable due to the fact that agro-industrial wastes are usually collected after the harvesting agricultural crops, and many of them have a seasonality nature, which affects the logistics and operation of the biorefinery. Therefore, the challenge is to manage biomass availability and storage in order to maintain a continuous *in situ* operation and production (Yue et al., 2014).

## Biomass

First, it should be clarified that biomass is any organic material that can constitute the main raw material of a biorefinery, and it is classified into four types according to its origin (Maity, 2015):

- I. Energy crops (corn, sugarcane, oil palm, etc.)
- II. Agro-industrial waste (palm kernel, coffee pulp, etc.)
- III. Wastes from tree pruning, gardening, etc.
- IV. Municipal and industrial waste


Second-generation or type II biomass is a renewable source of energy and it corresponds to the biodegradable fraction of products, wastes and residues of agriculture, forestry, cattle raising and related industries, as well as the above-mentioned fraction of municipal and industrial wastes (Bentsen et al., 2014; Löffler et al., 2010; Martinez et al., 2018). Additionally, biomass is the only renewable resource that can be transformed into gas, liquid and/or solid fuels by physical, thermal, thermochemical and/or biological processes (see Figure 1) (Balagurumurthy, Singh, Ohri, and Prakash, 2015; Escalante Hernández, Orduz Prada, Zapata Lesmes, Cardona Ruiz, and Duarte Ortega, 2010; ISAGEN, 2005).

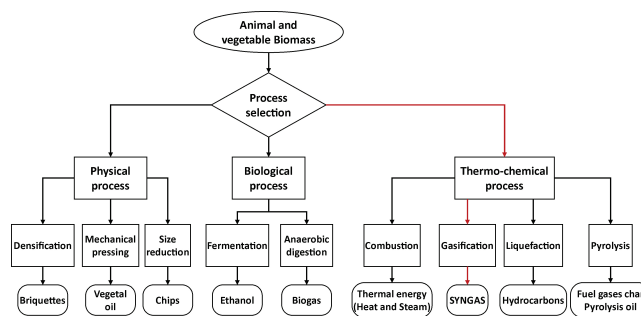

**Figure 1.** Energy recovery processes.

**Source:** Authors

In Colombia, there are many sources of residual biomass as a result of its agricultural vocation (Escalante Hernández et al., 2010; Hernández A., 1994) and the amount of agro-industrial waste from crops are of great socioeconomic importance in the country (see Figure 2). Such waste can be turned into a great opportunity to generate high value-added chemicals and/or electrical energy (Ekman et al., 2013).

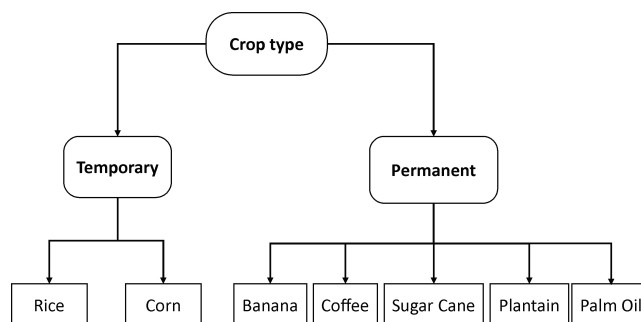

**Figure 2.** Crops that generate waste biomass in Colombia.


**Source:** Authors

These agro-industrial wastes are based on organic polymers such as lignin and cellulose. Due to a structure composed of

carbohydrate chains, this kind of biomass is highly oxygenated in comparison with conventional fossil fuels, including liquid hydrocarbons and carbon. Nevertheless, its main constituent is carbon (Virmond, Rocha, Moreira, and José, 2013). Even though this renewable resource employed as raw material to produce energy, chemicals, and fuels will not satisfy humanity's needs in the short term, it will open the possibility of being a more sustainable and environmentally-friendly society through the concept of biorefineries (Clark, 2007).

## Biorefineries

This type of facility is firmly based on the principles of sustainable use of land and green raw materials, environmentally-friendly technologies, and energy self-sufficiency, among others (Gil-Montenegro, Arocha-Morales, Rojas-Pérez, and Narváez-Rincón, 2019; Kamm, Schönicke, and Hille, 2016). It can transform biomass and/or biologic materials into fuels, chemicals, pharmaceuticals, energy, and even food and animal feed (Demirbas, 2009, 2010b; Ekman et al., 2013; Kamm et al., 2016; Löffler et al., 2010) (see Figure 3). These multiproduct platforms are designed and operated embracing the previously described sustainability principles and considering the features of the biomass, the sub products, and final products in terms of biochemical and chemical composition in order to find the best technologies and/or conversion routes that generate the most added value, profitability, and the least negative impact on the environment (Kamm et al., 2016; Maity, 2015).

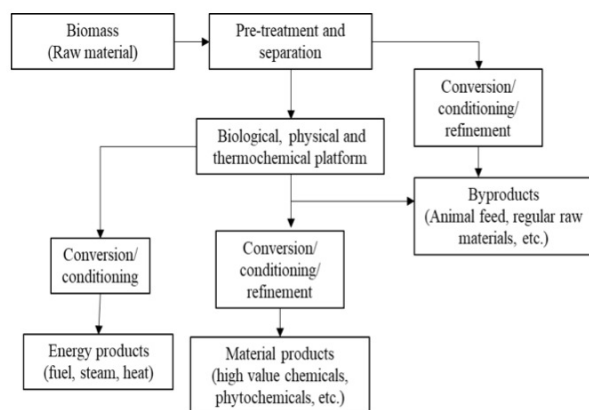

**Figure 3.** Scheme of the operation of a biorefinery.

**Source:** Authors

Although Figure 3 and Table 1 describe several types of biorefineries, the differences between them are the type of treatment or conversion route that the biomass follows (thermal, biological or chemical), the production technologies, the characteristics of the raw materials, and their final products (Demirbas, 2009, 2010b; Kamm and Kamm, 2004; Löffler et al., 2010). Particularly, biorefineries that convert biomass into fuels, high value-added chemicals, electricity, and heat can generally be divided into two

types: thermochemical and biological (Joglekar, Pathak, and Mandavgane, 2019; Parajuli et al., 2015). Thus, the types of biorefinery and the associated products are shown in Table 1.

**Table 1.** Classification of biorefineries according to their conversion route

Biorefinery	Path	Products
Biosyngas-based	Thermochemical	Syngas, hydrogen, methanol, dimethyl ether, diesel (Fischer-Tropsch)
Pyrolysis-based	Thermochemical	Bio-oils, fuels, diesel, and hydrogen, among others
Hydrothermal reforming	Thermochemical	Hydrocarbon compounds, chemicals, diesel and fuels
Fermentation-based	Biological	Bioethanol
Oil from vegetable species	Chemical	Biodiesel, diesel, and gasoline

**Source:** Demirbas, 2010b

The operation, functionality, and characteristics of a biorefinery are usually compared to those of an oil refinery (Ariel, Alzate, Camilo, Toro, and Peña, 2018; Carey et al., 2016; Maity, 2014) because they work in a similar way, and a great portion of the products obtained from this fossil material, or their substitutes, can be manufactured from biomass (Kamm and Kamm, 2004; Kamm et al., 2016; Löffler et al., 2010). However, the most important difference is that oil refineries use a non-renewable resource (petroleum), while biorefineries use a renewable option (biomass) (Ariel et al., 2018; Carey et al., 2016; Haro, Ollero, Perales, and Vidal-Barrero, 2013).

Currently, there is another concept or industry like a biorefinery that seeks to mitigate environmental damage and use resources in a sustainable and rational way: polygeneration. Using this concept enables producing power and high-quality, high value-added chemical products through the efficient transformation of mainly non-renewable natural resources, such as carbon or natural gas. Therefore, this type of systems and biorefineries is considered to be the future of chemical and electrical power generation industries (Gangadharan, Zanwar, Zheng, Gossage, and Lou, 2012; Löffler et al., 2010).

The possibility of making a wide range of products greatly depends on the availability and characteristics of the biomass, its chemical composition of raw materials, and the technologies used for their transformation and energy recovery (Ekman et al., 2013; Maity, 2015; Zondervan et al., 2011). Industries that can apply several technologies and processes to transform a raw material (carbon and natural gas for polygeneration plants and biomass for biorefineries) provide a greater economic profit, rational and optimal use of resources, higher energy efficiency, less polluting emissions, and less negative effects on the environment (Kachrimanidou et al., 2015). To enjoy these benefits,

the optimal operating conditions of a plant have to be carefully determined. Nevertheless, these conditions or operating parameters must not be generalized, because this type of facilities should be planned and adjusted to economic characteristics related to the market, the availability of resources, and the features of the raw materials associated with the plant's location (Demirbas, 2009; Leduc, Lundgren, Franklin, and Dotzauer, 2010; Löffler et al., 2010).

Some literature and studies try to formulate, plan, and determine the best operating conditions for a plant that manufactures several types of products from renewable and non-renewable sources by simulating chemical processes and generating mathematical models and sensitivity analyses. These works try to model the operation of a plant in different situations. In general, they change market prices of raw materials, products, technologies and transformation. The operating parameters obtained from the development and solution of the models and simulations aim to guarantee the economic sustainability of the plant (Buragohain, Mahanta, and Moholkar, 2010b; Demirbas, 2009; Ekman et al., 2013; Zondervan et al., 2011). In some cases, they also minimize negative effects on the environment and the society (Gangadharan et al., 2012; Ng, Andiappan, Chemmangattuvalappil, and Ng, 2015).

Although plants or facilities of this kind have been widely studied in economic terms (Ng et al., 2015), their flexibility and capacity to respond to external disturbances have not been examined (Meerman, Ramírez, Turkenburg, and Faaij, 2012; Ngan et al., 2020; Sadhukhan et al., 2018). Furthermore, the economic and environmental costs of conventional technologies to manufacture a certain product are not usually compared to those of a novel alternative such as biorefineries. This is the case of a work that reports that the efficient energy recovery of nitrogen from a source of waste biomass at a biorefinery could reduce the existing dependence on the Haber-Bosch process, which uses between 1 and 2% of the total energy consumed world-wide (Carey et al., 2016). Thus, it avoids the consumption of natural resources, energy, and emissions harmful to human health that are associated with this process, which enables to obtain the fixed nitrogen needed to fertilize soils devoted to agriculture. Additionally, there is a considerable number of articles that deal with energy recovery from second-generation biomass under the concept of biorefinery. Nevertheless, they have not extensively discussed or considered the possibility of extracting high value-added biochemical and phytochemicals from raw biomass and, at the same time, produce fuels, electricity, and chemicals in general (Folmer, 2014; Lapkin et al., 2014), as can be confirmed in the work by Hughes et al. (2014).


Since Colombia is an agricultural country, the implementation of this type of concepts and methods entails a great challenge and opportunity for sustainable development, since niche markets such as pharmaceuticals and cosmetics demand novel, functional, efficient, natural, and/or biobased ingredients (Departamento Nacional de Planeación DNP-DDRS Ministerio de Agricultura y Desarrollo Rural, Ministerio de Ambiente, Vivienda y Desarrollo Territorial Ministerio de

Comercio, Social, Exteriores, and Colciencias, 2011; Parajuli et al., 2015). The global market of special biochemical products (e.g., enzymes, flavors and fragrances, biopesticides, thickening agents, plant growth promoters, essential amino acids, and vitamins) based on biomass currently amounts to several billion US dollars per year, and it grows from 10 to 20% annually (Parajuli et al., 2015).

## Phytochemical extraction and production of high value-added chemicals

There are two types of metabolites in biomass: primary and secondary. The first kind includes macromolecular compounds, such as polysaccharides (lignin and cellulose); the second (low-content) consists of waxes, oils, terpenes, and sterols. These components are highly relevant in biorefineries because they are functional and, in many cases, present biological activity (Clark et al., 2006; Herrero and Ibañez, 2018; Moncada, Aristizábal, and Cardona, 2016).

The extraction of secondary metabolites and the manufacture of natural products are gaining traction in the food, cosmetics, and pharmaceutical industries because final consumers are increasingly interested in biobased products of organic and sustainable nature that embrace the principles of green chemistry (Bergs et al., 2013; Herrero and Ibañez, 2018; Hughes et al., 2014). Moreover, the current trend in the field of profitable and sustainable recovery of waste biomass from agro-industrial processes (e.g., the coffee agroindustry) is exploiting the bioactive fractions and/or precursors of chemical compounds of general interest such as polyphenols, lipids, and carbohydrates, thus generating added value throughout the production chain (Ariel et al., 2087; Burniolfigols, Cenian, Skiadas, and Gavalá, 2016). Figure 4 presents the block diagram of a proposed biorefinery that includes phytochemical extraction in the operation.

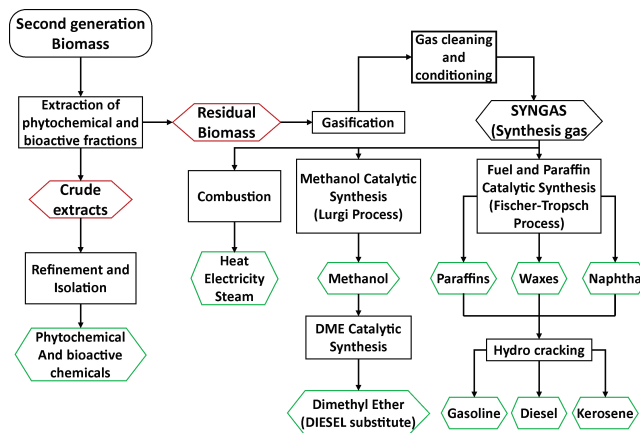

**Figure 4.** Scheme of the operation of a biorefinery.

**Source:** Authors



Biorefineries usually transform the entire biomass into fuels or platform chemicals, and do not take advantage of secondary metabolites. In Figure 4, a proposed biorefinery is shown. It considers a novel procedure: phytochemical extraction prior to the thermochemical processes. The main advantage is that bioactive chemicals from secondary metabolites have the best market price per weight of material, since they are employed as raw materials in high-value industries such as pharmaceutical, cosmetic or human wellness industries.

The extraction method depends on the type of biomass (Ariel et al., 2018). Therefore, to have a sustainable and profitable operation, two questions should be addressed: What is the influence of the conditions of the process on the efficiency of the sequential or direct extraction of the target chemical fractions? And how does the scale of the process affect its performance? (Trivedi et al., 2016).

There are many well-known extraction techniques nowadays. Some of the most popular are solid-liquid, liquid-liquid, acid-base, and ultrasound and microwave-assisted extraction (Rombaut, Tixier, Bily, and Chemat, 2014a; Segneanu, Cziple, and Vlazan, 2013). Other techniques use pressurized fluids such as solvents; this is the case of supercritical fluids and pressurized liquids, among others (Herrero and Ibañez, 2018; Yeoh, Chong, Azahan, and Rahman, 2013). Nevertheless, the latter are associated with high investment costs, although, real economic evaluations of the process (including large-scale simulations) have not been carried out in most cases (Herrero and Ibañez, 2018).

In leaching extraction, the main issue is to find the most adequate solvent that enables the extraction of the phytochemicals of interest from biogenic raw material (Aristizábal-Alzate, 2016; C. E. Aristizábal, Vargas, and Alvarado, 2017; Herrero and Ibañez, 2018). However, the choice of solvents must be guided by a technical framework that includes key factors to achieve high efficiency (e.g., selectivity of the extraction, viscosity of the solvent, surface tension, cellular location of the target compound, and the part of the plant to be used as biomass (Bergs et al., 2013), among others) and observes the principles of green chemistry (Chemat, Vian, and Cravotto, 2012; Ghandi, 2014). For example, a numerical technique to select the solvent was proposed by Aristizábal (2016). It considers the Hansen solubility parameters of the secondary metabolites of interest and different solvents, as well as the affinity and the improvement of the performance of the solid-liquid extraction process. Table 2 below provides general information on some agro-industrial wastes, and the type of biorefinery that could be used to recover their energy, and possible high value-added products of industrial interest.

Biomass resulting from extraction processes is forwarded to thermochemical treatment, chemical or biological hydrolysis, and/or fermentation to obtain other high value-added chemicals (Moncada et al., 2016). Thus, byproducts are recycled, sustainability and profitability are increased, and the emission of pollutants by the biorefinery is reduced (Clark, 2007; Kajaste, 2014; Kamm et al., 2016). However, the recommendation in this case is a

thermochemical process because traces of solvents used during phytochemical extraction may inhibit the growth of microorganisms, which would be counterproductive for a biological treatment (Lapkin et al., 2014). Furthermore, biofuels obtained from second-generation biomass have not been commercialized due to the low efficiencies and high costs of the equipment (Virmond et al., 2013). Besides, thermochemical methods use all components of the biomass (biodegradable and non-biodegradable fractions) without a pre-treatment stage, and they take from seconds to hours to produce hydrocarbons, value-added chemicals, and electricity, compared to biochemical processes that take days to complete the biotransformation and use microorganisms to turn the organic and biodegradable material only into alcohols and biogas by anaerobic digestion. Additionally, the slightest change in the composition of the biomass could produce functionality failures and undesired production due to changes in the metabolic route (Singh, Krishna, Mishra, Kumar, and Bhaskar, 2016). Therefore, the next section will describe thermochemical routes: gasification, methanol production, and the Fischer-Tropsch process. It can then be coupled with phytochemical extraction.

## Gasification

The objective of this thermochemical treatment is to produce a mixture of CO, CO<sub>2</sub>, H<sub>2</sub> and CH<sub>4</sub> known as syngas (Molino, Chianese, and Musmarra, 2016; Pacioni et al., 2016; Pereira, Da Silva, De Oliveira, and Machado, 2012). The chemical reactions in this process take place in an environment with a limited amount of oxygen or another kind of oxidizing agent (air, steam, and a mixture of them) (Heidenreich and Foscolo, 2015; Richardson, Drobek, Julbe, Blin, and Pinta, 2015; Ramirez Rubio, Sierra, and Guerrero, 2011). During gasification, the biomass fed to the system is partially oxidized. This endothermal process, which occurs at high temperatures (500-1400 °C) and atmospheric pressures up to 33 bar (Ahmad, Zawawi, Kasim, Inayat, and Khasri, 2016), also needs a heat supply (Molino et al., 2016). Below, Figure 5 illustrates the gasification process and its different stages. It also shows the inputs and outputs of this treatment.


The material fed to the equipment (biomass, in this case) should contain an amount of water content below 35%. Water contents between 25 and 60% directly affect the efficiency of the gasifier, which results in energy losses (Ahmad et al., 2016).

Syngas can be used for several purposes such as heat and electrical energy generation. Furthermore, synthesis gas is employed to produce fuels through the Fischer-Tropsch process, methanol through the Lurgi-Ruhrgas process, and dimethyl ether and formaldehyde (Ahmad et al., 2016; Clifford, 2015; Moncada et al., 2016; Pacioni et al., 2016). Nevertheless, the quality of Syngas should be considered when used as raw material to produce energy and/or the previously mentioned chemicals, since it is affected by several factors, conditions, and operating parameters such as:

**Table 2.** Agro-industrial wastes and products of industrial interest

Agro-industrial waste	Type of biorefinery	Extraction method	High value-added products	Other products of industrial interest	References
Coffee pulp, coffee bean husk, silver skin	Biosyngas-based	Hydroalcoholic solvents	Chlorogenic acid and other polyphenols, pectins, and flavonoids	Methanol, synthetic gasolines, dimethyl-ether, and thermal energy	(Folmer, 2014; Hughes et al., 2014; Murthy and Madhava Naidu, 2012)
	Based on fermentation and/or biological processes	Supercritical water	Enzymes, fungi, and critical acid	Ethanol and biogas	
Orange peel	Biosyngas-based	Hydrodistillation Solvent-free, microwave-assisted	Limonin, pectens, and essential oils, among others	Methanol, synthetic gasolines, dimethyl-ether, and thermal energy	(Aissou, Chemat-Djenni, Yara-Varón, Fabiano-Tixier, and Chemat, 2017; Negro, Mancini, Ruggeri, and Fino, 2016), (Rombaut, Tixier, Billy, and Chemat, 2014)
Olive tree pruning waste, olives, and olive pulp	Based on fermentation and/or biological processes	Solvents and acid hydrolysis treatments Ultrasound-assisted	Polyphenols and orujo (olive waste) oil	Ethanol	(Romero-García et al., 2014)
Avocado agro-industrial waste	Based on fermentation and/or biological processes	Enhanced-Fluidity Liquid Extraction (EFLE) with CO <sub>2</sub> and ethanol	Polyphenols and xylitol	Ethanol	(Dávila, Rosenberg, Castro, and Cardona, 2017)

Source: Authors

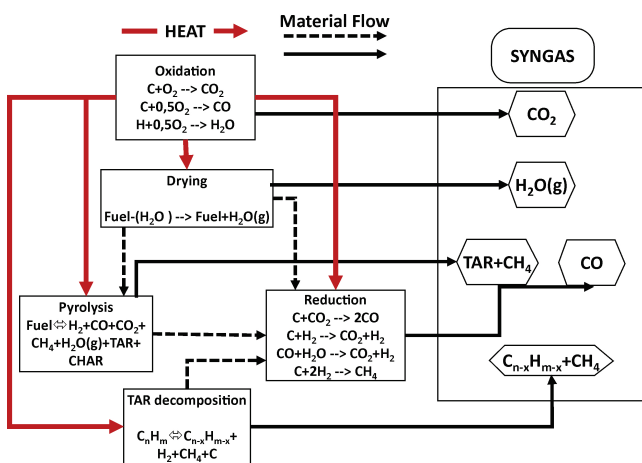**Figure 5.** General scheme and areas of a gasification process.

Source: Based on (Molino et al., 2016)

- Type of gasifier
- Operating temperature
- Particle size of the raw material
- Gasifying agent

Since the most desirable product is a synthesis gas rich in CO and H<sub>2</sub> to be used as chemical platform, temperatures in the 1200-1300 °C range allow the formation of these compounds and avoid the formation of methane. Specifically, particle sizes below 0,3 mm favor the production of CO, H<sub>2</sub>, and CH<sub>4</sub>, and reduce that of CO<sub>2</sub>. However, particle sizes under 0,15 mm affect the performance of H<sub>2</sub> production. To select the gasifying agent, several studies demonstrated that a mixture of oxygen and vapor produces higher concentrations of CO and H<sub>2</sub> in the syngas (63,27-72,56%) than using air (52,19-63,31%) (Ahmad et al., 2016).

Table 3 presents, as an example, the composition of a synthesis gas obtained from the gasification of Colombian agro-industrial waste as a function of the variation of the vapor/biomass ratio. It indicates that the initial characteristics of the biomass influence the final composition of the syngas and, depending on the selection of the gasifying agent and biomass ratio, this gas can be enriched or impoverished in one or several of its constituents. For example, we can observe that, regardless of the type of biomass, when the amount of water vapor is increased with respect to the biomass, the content of hydrogen (H<sub>2</sub>) rises and carbon monoxide (CO) falls. Therefore, special attention must be paid when the input gasification parameters are set because, depending on the final use of the syngas, they should meet a certain composition, much more so if Syngas is recovered during the catalytic synthesis of other chemical compounds.

**Table 3.** Comparison of syngas composition (%v/v) and its calorific value over 1,123 K (850 °C) for different vapor/biomass ratios (weight fraction)

Palm kernel	vapor/biomass	CO	CO <sub>2</sub>	H <sub>2</sub>	CH <sub>4</sub>	Ho (MJ/NM3)
% dry basis	0,50	45,24	2,36	51,45	0,95	12,64
	1,00	33,32	10,40	55,30	0,98	11,64
	1,50	26,16	15,22	57,67	0,93	11,02
	2,00	21,65	18,25	59,22	0,88	10,63
Coffee silver skin	vapor/biomass	CO	CO <sub>2</sub>	H <sub>2</sub>	CH <sub>4</sub>	Ho (MJ/NM3)
% dry basis	0,50	44,80	4,10	50,20	0,90	12,41
	1,00	32,97	11,97	54,14	0,91	11,42
	1,50	25,87	16,68	56,58	0,89	10,83
	2,00	21,40	19,62	58,14	0,84	10,44

Source: Garcia, 2011

There are two types of phenomenological models that theoretically describe the behavior of the gasification process. The first kind includes 1D, 2D, or 3D kinetic models (depending on the space coordinates) that predict in more detail the phenomenon, the evolution of the species, and the thermal and dynamic state of the process in the space conditions under consideration, due to the application of chemical kinetics, the description of the transport phenomena, and the balances between matter, energy, and momentum. The second type of model is related to chemical equilibrium, which can be divided into two groups: stoichiometric and non-stoichiometric methods (Costa, La Villetta, and Massarotti, 2015; Garcia, 2011; Rodrigues, Muniz, and Marcilio, 2016). Nevertheless, the second kind requires a number of kinetic parameters, determined through experimentation, that can range from a few to thousands depending on the selected gasification equipment, operating conditions, and kind of biomass (García, 2011). The main reactions in the gasification process are illustrated in Table 4.

**Table 4.** Basic reactions in the gasification process. NR: Not reported

Reaction	Heat of reaction (MJ/kmol)	Name of the reaction
Heterogeneous reactions		
$C + 0,5O_2 \leftrightarrow CO$	-111	Char partial combustion
$C + CO_2 \leftrightarrow 2CO$	172	Boudouard reaction
$C + H_2O \leftrightarrow CO + H_2$	131	Water-gas
$C + 2H_2 \leftrightarrow CH_4$	-75	Methanation
Homogeneous reactions		
$CO + 0,5O_2 \leftrightarrow CO_2$	-283	Partial combustion of CO
$H_2 + 0,5O_2 \leftrightarrow H_2O$	-242	Partial combustion of $H_2$
$CO + H_2O \leftrightarrow H_2 + CO_2$	-41	Shift reaction
$CH_4 + H_2O \leftrightarrow 3H_2 + CO$	206	Vapor-methane reforming
$H_2 + S \leftrightarrow H_2S$	NR	$H_2S$ formation
$0,5N_2 + 1,5H_2 \leftrightarrow NH_3$	NR	$NH_3$ formation

**Source:** Ahmad et al., 2016

In addition, thermodynamic equilibrium or 0D models require less information and are valuable because they can predict the thermodynamic limits of a gasification system, regardless of the type of gasifier. As a result, they are simple, adequate to study the influence of operating parameters on the composition of the syngas (Hian, Saleh, and Abdul Samad, 2016; Rodrigues et al., 2016; Ruggiero and Manfrida, 1999), but they are only valid under chemical equilibrium conditions (Rodrigues et al., 2016). Other approaches involve Neural Networks and Computational Fluid Dynamics (CFD) (Costa et al., 2015; George, Arun, and Muraleedharan, 2016; La Villetta, Costa, and Massarotti, 2017).

## Syngas: chemical platform to generate added value

As previously mentioned, the goal of a biorefinery is to integrate processes in order to simultaneously produce

chemicals, fuels, and electricity that generate the optimum economic benefit (Ariel et al., 2018; Parajuli et al., 2015). For that purpose, processes and technologies that ensure the plant's sustainability and versatility in the long term should be integrated by incorporating different processing units in a modular way (C. Aristizábal, 2016). The following subsections describe some of the routes selected to exploit syngas and thus generate added value from its transformation into fuels, chemicals, and/or thermal energy (Bai, Liu, Lei, Li, and Jin, 2015; Rauch, Hrbek, and Hofbauer, 2014).

### Catalytic synthesis of methanol

Methanol, or methyl alcohol ( $CH_3OH$ ), is one of the few chemical substances produced in megatons and traded in international commodity markets (Cooper, 2010). This alcohol is the precursor of a great variety of chemical compounds, such as formaldehyde (70%), methyl tert-butyl ether (20%), and acetic acid. It also is an excellent fuel because of its octane rating of 113, the gasoline/methanol mixture (90/10) can increase the octane number of gasoline up to 130, and the engines that work with reach an efficiency of about 43% (Bozzano and Manenti, 2016). Besides being used to produce biofuels, it holds an approximately 10% share of total raw materials involved in this process, and it can be used to manufacture dimethyl ether, a chemical compound with the potential to compete with the consumption of conventional diesel (Bansode and Urakawa, 2014; Gangadharan et al., 2012; Pontzen, Liebner, Gronemann, Rothaemel, and Ahlers, 2011). Methyl alcohol would favor the transition from fossil to natural resources (Bozzano and Manenti, 2016).

**Table 5.** Methanol synthesis technologies

Technology supplier	Operating temperature (°C)	Operating pressure (bar)	Notes
ICI (Syntex)	210-290	50-100	ARC, Tubular cooled isothermal Linde, and Toyo reactor
Lurgi	230-265	50-100	Tubular, isothermal reactor
Mitsubishi	235-270	50-200	Tubular, isothermal reactor
Kellog	–	–	Spherical reactor geometry
Linde AG	240-270	50-150	–
Haldor Topsøe	200-310	40-125	To this day, there are no plants in commercial operation that apply this process.

**Source:** Riaz, Zahedi, and Klemesš, 2013

Methanol can be manufactured through the catalytic reaction between  $CO$ ,  $H_2$ , and  $CO_2$  (Cooper, 2010). The conventional processes to produce this substance from synthesis gas or syngas are carried out in a multitubular fixed-bed reactor with a pellet-shaped  $Cu-ZnO-Al_2O_3$  catalyst operating in gas phase (Hamelinck and Faaij, 2002; Holmgren, Berntsson, Andersson, and Rydberg, 2012; Leduc et al., 2010; Narvaez, Chadwick, and Kershenbaum, 2014). As this is a highly exothermic process, a cooling system should be

implemented because high temperatures affect the useful life of the catalyst and, therefore, the reactor's performance. Table 5 below presents the main suppliers of methanol synthesis technologies and their operating conditions.

The equipment that produces methanol is fed syngas with a 2:1 ratio of hydrogen to carbon monoxide (Gangadharan et al., 2012; Gao et al., 2008; Holmgren et al., 2012). In addition, two other chemical pathways take place to generate methanol: either the CO<sub>2</sub> reacts with hydrogen to form methanol and water, or there is a shift reaction (see Table 6).

**Table 6.** Chemical reactions and equations of the methanol production process

Description of the chemical reaction	Chemical equation
Main reaction in the process of obtaining methanol from syngas	$\text{CO} + 2\text{H}_2 \rightarrow \text{CH}_3\text{OH}$
Carbon dioxide reaction in the methanol reactor	$\text{CO}_2 + 3\text{H}_2 \rightarrow \text{CH}_3\text{OH} + \text{H}_2\text{O}$
Shift reaction inside the methanol reactor	$\text{CO} + \text{H}_2\text{O} \rightarrow \text{CO}_2 + \text{H}_2$

**Source:** Yusup, Phuong Anh, and Zabiri, 2010 and Riaz, Zahedi, and Klemes, 2013

The kinetics of the chemical reactions involved in the process of catalytic synthesis of methanol is the following (Riaz et al., 2013):

$$r_{\text{CO}} = \frac{k_1 f_{\text{CO}} f_{\text{CO}}^2 (1 - \beta_1)}{(1 + K_{\text{CO}} f_{\text{CO}} + K_{\text{CO}_2} f_{\text{CO}_2} + K_{\text{H}_2} f_{\text{H}_2})^3} \quad (1)$$

$$r_{\text{CO}_2} = \frac{k_2 f_{\text{CO}_2} f_{\text{H}_2}^2 (1 - \beta_2)}{(1 + K_{\text{CO}} f_{\text{CO}} + K_{\text{CO}_2} f_{\text{CO}_2} + K_{\text{H}_2} f_{\text{H}_2})^4} \quad (2)$$

Where,

$$\beta_1 = \frac{f_{\text{M}}}{K_{f_1} f_{\text{CO}} f_{\text{H}_2}^2} \quad (3)$$

$$\beta_2 = \frac{f_{\text{M}} f_{\text{H}_2\text{O}}}{K_{f_2} f_{\text{CO}_2} f_{\text{H}_2}^3} \quad (4)$$

$$k_1 = 191, 2e^{-\left(\frac{41,770}{RT}\right)} \quad (5)$$

$$k_2 = 6,392e^{-\left(\frac{60,920}{RT}\right)} \quad (6)$$

$$K_{\text{CO}} = e^{-2,902 - 29,640\left(\frac{1}{T} - \frac{1}{508,9}\right)} \quad (7)$$

$$K_{\text{H}_2} = e^{-1,692 + 2001\left(\frac{1}{T} - \frac{1}{508,9}\right)} \quad (8)$$

In this proposed mathematical model,  $r$  denotes the reaction rate;  $f$ , fugacity;  $T$ , temperature; and  $R$ , the ideal gas constant.

The chemical synthesis processes that use catalysts (such as the production of methanol with copper-based catalysts)

are very sensitive to the presence of sulfur and carbon dioxide (Holmgren et al., 2012). These compounds must be removed; otherwise, syngas conversion is restricted, and operating costs increase due to the continuous replacement of the catalyst due to poisoning, aging, or reduction of its active sites. Another issue found in industrial-scale methanol synthesis is the limitation imposed by the thermodynamic equilibrium. Therefore, many efforts are focused on developing technologies that expand methanol production by removing subproducts with selective membranes. However, for this purpose, mathematical and optimization models should be created to compare their efficiency and functionality to traditional methods.

To purify methanol, a distillation tower can be used to remove the greatest possible number of impurities that may affect its quality, value, or simply the subsequent processes which use this product as raw material. This is the case of the production of dimethyl ether (DME), another potential substitute of diesel (Gangadharan et al., 2012; Pontzen et al., 2011; Ravaghi-Ardebili and Manenti, 2015).

### Fischer-Tropsch process


This process was developed by German inventors Franz Fischer and Hans Tropsch in the 1920's to produce liquid hydrocarbons (Buragohain et al., 2010b; Damartzis and Zabaniotou, 2011). It is a catalytic technique by which synthesis gas (CO + H<sub>2</sub>), also known as syngas, is transformed into a mixture of hydrocarbons: olefins, paraffins, waxes, and oxygenated products (synthetic fuels) or naphtha, a precursor in gasoline production (Arsalanfar et al., 2012; Buragohain et al., 2010b; Damartzis and Zabaniotou, 2011). The product obtained from this process greatly depends on the temperature, operating pressure, and the type of catalyst in use (Damartzis and Zabaniotou, 2011), which is generally made of metals in Group VIII such as iron (Fe), cobalt (Co), nickel (Ni), and ruthenium (Ru) (Arsalanfar et al., 2012). Equation (9) illustrates the general chemical reaction that represents this process:



A conventional catalyst based on cobalt (Co) enables the production of paraffinic diesel oils and, despite being expensive, it presents high activity at low temperatures and a ratio of H<sub>2</sub>/CO or stoichiometric number (SN) value of 2, which extends the useful life of the catalyst and prevents deactivation due to sintering or ageing (Buragohain, Mahanta, and Moholkar, 2010a; Kim, Jun, Joo, Han, and Song, 2009). Additionally, a Fe-based catalyst has also been developed to produce hydrocarbons, namely olefinic gasolines extracted from syngas with a substoichiometric H<sub>2</sub>/CO ratio, i.e., less than 2 (Buragohain et al., 2010a). Figure 6 presents a diagram of syngas production and exploitation through the Fischer-Tropsch process. Furthermore, it shows some of the conditions and characteristics of this catalytic transformation process of syngas into fuels:

The main Fischer-Tropsch reactions can be divided into five basic steps:



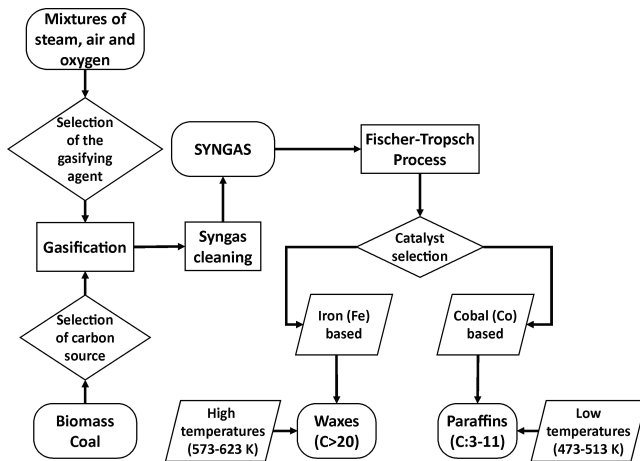

**Figure 6.** Diagram of syngas production and exploitation by catalytic Fischer-Tropsch.

Source: Authors

1. Adsorption of CO on the surface of the catalyst
2. Start of the polymerization by formation of a methyl radical (by dissociation of CO and hydrogenation)
3. Polymerization by condensation (addition of CO and H<sub>2</sub>, and water release)
4. Termination
5. Product desorption

The chemical equations of the reactions in a Fischer-Tropsch process are detailed in Table 7. Reaction 7 represents the transformation of the syngas into the products of interest: fuels with a number of carbon (C) atoms greater than 5.

**Table 7.** Chemical reactions in the Fischer-Tropsch process

Chemical equation	Reaction
$\text{CO} + 3\text{H}_2 \rightarrow \text{CH}_4 + \text{H}_2\text{O}$	(1)
$2\text{CO} + 4\text{H}_2 \rightarrow \text{C}_2\text{H}_4 + 2\text{H}_2\text{O}$	(2)
$2\text{CO} + 5\text{H}_2 \rightarrow \text{C}_2\text{H}_6 + 2\text{H}_2\text{O}$	(3)
$3\text{CO} + 7\text{H}_2 \rightarrow \text{C}_3\text{H}_8 + 3\text{H}_2\text{O}$	(4)
$4\text{CO} + 9\text{H}_2 \rightarrow n\text{-C}_4\text{H}_{10} + 4\text{H}_2\text{O}$	(5)
$4\text{CO} + 9\text{H}_2 \rightarrow i\text{-C}_4\text{H}_{10} + 4\text{H}_2\text{O}$	(6)
$6,05\text{CO} + 12,23\text{H}_2 \rightarrow \text{C}_{6,05}\text{H}_{12,36}(\text{C}_5^+) + 6,05\text{H}_2\text{O}$	(7)
$\text{CO} + \text{H}_2\text{O} \rightarrow \text{CO}_2 + \text{H}_2$ (Water-gas reaction)	(8)

Source: Authors

Kinetics depend on the selected type of catalyst. For that reason, Table 8 reports the parameters of two power-law kinetics. The first one corresponds to a Fischer-Tropsch (FT) process with a catalyst based on Co and supported by Alumina (Co/Al<sub>2</sub>O<sub>3</sub>); the second one is based on Fe.

Moreover, Table 9 summarizes the chemical reactions of a mechanism that involves a Fischer-Tropsch process with a catalyst based on cobalt (Co), iron (Fe), and manganese (Mn).

**Table 8.** Kinetic model parameters for the Fischer-Tropsch process with Cobalt (Co) and iron (Fe) catalysts

Kinetic model for a cobalt-based (Co) catalyst				
$R_j = A_j \exp\left(\frac{E_j}{T \cdot R_g}\right) P_{\text{CO}}^n P_{\text{H}_2}^m$				
Reaction	n	m	E <sub>j</sub> [kJ/mol]	A <sub>j</sub> [mol*Pa <sup>n+m</sup> /g*s]
R. 1	-0,39	1,02	101,15	5,45E+01
R. 2	-0,24	0,15	78,79	1,20E-03
R. 3	-0,26	0,18	59,95	1,45E-03
R. 4	-0,55	0,25	33,73	2,32E-06
R. 5	-0,82	0,35	23,04	2,81E-09
R. 6	-0,76	0,32	17,83	6,57E-10
R. 7	-0,15	1,25	21,25	3,24E-08
R. 8	-1,10	1,26	50,24	5,99E-05

Kinetic model for an iron-based (Fe) catalyst				
$R_j = 0,278k_j \exp\left(\frac{-E_j}{T \cdot R_g}\right) P_{\text{CO}}^n P_{\text{H}_2}^m$ [mol/Kg*s]				
Reaction	n	m	kJ	E <sub>j</sub>
R. 1	-1,0889	15,662	142.583,8	83 423,9
R. 2	0,7622	0,0728	51,556	65 018
R. 3	-0,5645	13,155	24,717	49 782
R. 4	0,4051	0,6635	0,4632	34 885,5
R. 5	0,4728	1,389	0,00474	27 728,9
R. 6	0,8204	0,5026	0,00832	25 730,1
R. 7	0,5850	0,5982	0,02316	23 564,3
R. 8	0,5742	0,710	410,667	58 826,3

Source: Moazami, Wyszynski, Rahbar, Tsolakis, and Mahmoudi, 2017) and (Rahimpour, Jekar, and Jamshidnejad, 2012).

In turn, Table 10 presents the model and kinetic parameters for this mechanism.

**Table 9.** Chemical reaction mechanism for a Fischer-Tropsch process with a Co-Fe-Mn catalyst

Reactions	
1	$\text{CO} + * \rightleftharpoons \text{CO}^*$
2	$\text{H}_2 + * \rightleftharpoons \text{H}_2^*$
3	$\text{CO}^* + \text{H}_2^* \rightleftharpoons \text{CH}_2\text{O}^* + *$
4	$\text{CH}_2\text{O}^* + \text{H}_2^* \rightleftharpoons \text{CH}_3\text{OH}^* + *$
5	$\text{CH}_3\text{OH}^* \rightleftharpoons \text{CH}_2^* + \text{H}_2\text{O}$

Source: Arsalanfar et al., 2012.

Throughout history, four main types of industrial reactors have been used to produce Fischer-Tropsch reactions (Steynberg, Dry, Davis, and Breman, 2004):

- *Fixed packed-bed tubular reactor:* SASOL (South African Synthetic Oil Ltd) call its reactor of this type Arge, which operates at 220-260 °C and 20-30 bar.
- *Circulating bed reactor:* Named Synthol by SASOL, it operates at 350 °C and 25 bar. It mostly produces olefinic gasoline.

**Table 10.** Model and kinetic parameters with a catalyst based on cobalt (Co), iron (Fe) and manganese (Mn)

Kinetic model for a catalyzer based on cobalt (Co), iron (Fe) and manganese (Mn)		
$-r_{FT-IX3} = \frac{k_p b_{CO} P_{CO} b_{H_2} P_{H_2}}{(1 + b_{CO} P_{CO} + b_{H_2} P_{H_2})^2}$		
Parameter	Value	Units
$k_0$	$1,6 \times 106$	mmol/min.g
$E_a$	825,200	kJ/mol
$k(563,15)$	0,0356	mmol/min.g
$k(57,15)$	0,0482	mmol/min.g
$k(583,15)$	0,0649	mmol/min.g
$k(593,15)$	0,0865	mmol/min.g
$b(CO)$	0,2190	bar <sup>-1</sup>
$b(H_2)$	0,0170	bar <sup>-1</sup>

Source: Arsalanfar et al., 2012.

- *Fluidized bed reactor*: SASOL Advanced Synthol, similar to Synthol in terms of operation but smaller for the same production capacity.
- *Slurry reactor*: The catalyst is suspended in a liquid (often waxes produced by the same reaction) through which synthesis gas is bubbled. Generally, these reactors work at low temperatures to produce a maximum of products with high molecular weight.

### Summary of operating conditions of syngas valorization processes

Table 11 summarizes some of the operating considerations and parameters to valorize syngas through thermochemical and catalytic processes and thus obtain thermal energy, electricity, fuels, and high value-added chemical compounds.

## Conclusions

The exploitation of second-generation biomass and the integration of phytochemical extraction and thermochemical processes such as gasification at a biorefinery are great alternatives to address the energy crisis and the demand for materials for different industries. This is possible because this kind of facilities are conditioned to abide by sustainability and green chemistry parameters; they are viable as long as they consider the social, environmental, and economic conditions, characteristics, and particularities of their area of influence, so that their implementation truly becomes a driver of industrial development and the production of natural ingredients, highly functional bioproducts, chemicals, fuels, and energy to promote development and well-being.

Few studies in this field consider the phytochemical extraction process from biomass, and they process the entire biomass matrix through thermochemical and biological treatments. Therefore, the proposed biorefinery considers all the value of biomass, due to the extraction of high value-added chemicals

**Table 11.** Operating conditions of syngas valorization processes

Parameters	Methanol synthesis <sup>a</sup>	Fischer-Tropsch process <sup>b</sup>
Operating temperature	230-265 °C	240-329 °C
Operating pressure	15-100 bar	20-30 bar
Catalyst	CuO-ZnO Cu/ZnO/Al <sub>2</sub> O <sub>3</sub> , CuO-ZnO-Al <sub>2</sub> O <sub>3</sub> Ga <sub>2</sub> O <sub>3</sub> -Pd/Silica Cu/ZnO/Al <sub>2</sub> O <sub>3</sub> /ZrO <sub>2</sub>	Co (Cobalt) or Fe (iron) with Al <sub>2</sub> O <sub>3</sub> .
Equivalence ratio ( $\phi$ ) or stoichiometric number (SN)	SN = 2,05	SN = 0,76-1,82
Products	Methanol	Long-chain hydrocarbons, synthetic gasolines, paraffins, etc.
Type of reactor	Multitubular isothermal fixed-bed reactor with a pellet-shaped catalyst operating in gas phase	Slurry reactor with Co catalyst (T = 200°-240 °C) Fluidized bed reactor with Fe catalyst (T = 300°-350 °C)

Source: <sup>a</sup>Manenti, Adani, Rossi, Bozzano, and Pirola, 2016; Riaz, Zahedi, and Klemes, 2013 and <sup>b</sup>Rauch et al., 2014.

such as phytochemicals, and, simultaneously, by transforming the residual biomass from the extraction into fuel or platform.

Theoretical models for the extraction of phytochemicals and kinetic models for thermochemical processes allow to find the best operating conditions for a biorefinery through computer simulation, thus saving resources in chemical reagents and chemical processes.

Colombia has an agricultural vocation and a remarkably abundant, yet diverse source of biomass. Consequently, the country is currently searching for alternatives that improve profitability in this sector and differentiation in world-wide markets by generating added value. A profitable and sustainable exploitation of biological and genetic resources should be focused on extracting natural high-value ingredients found in this diversity and important sources of waste biomass, such as agro-industrial activities. To support the production and operation costs of the plant, the available biomass must be used rationally, and the greatest possible number of products should be manufactured. However, due to the low content of this type of substances in vegetable matrices, such processing should be conducted at facilities, like biorefineries, that guarantee an efficient extraction and a comprehensive exploitation of this renewable resource.

## Acknowledgements

The Authors are grateful to ITM for the technical and economic support given to develop this research, and Carlos Esteban Aristizábal is grateful to Sapiencia for the half-scholarship under the program "Extendiendo Fronteras".

## References

- Ahmad, A. A., Zawawi, N. A., Kasim, F. H., Inayat, A., and Khasri, A. (2016). Assessing the gasification performance of biomass: A review on biomass gasification process conditions, optimization and economic evaluation. *Renewable and Sustainable Energy Reviews*, 53, 1333-1347. 10.1016/j.rser.2015.09.030
- Aissou, M., Chemat-Djenni, Z., Yara-Varón, E., Fabiano-Tixier, A. S., and Chemat, F. (2017). Limonene as an agro-chemical building block for the synthesis and extraction of bioactive compounds. *Comptes Rendus Chimie*, 20(4), 346-358. 10.1016/j.crci.2016.05.018
- Ariel, C., Alzate, C., Camilo, J., Toro, S., and Peña, Á. G. (2018). Fermentation, thermochemical and catalytic processes in the transformation of biomass through efficient biorefineries. *Catalysis Today*, 302, 61-72. 10.1016/j.cattod.2017.09.034
- Aristizábal-Alzate, C. E. (2016). Numerical determination of the solubility of vitamin C in various solvents, for selective extraction or for its incorporation in formulations oriented to care, welfare and health of the skin. *DYNA*, 83, 191-197. 10.15446/dyna.v83n199.54828
- Aristizábal, C. (2016, July). Biorrefinerías: Una Alternativa para el desarrollo y fortalecimiento industrial a partir del uso sostenible de la biodiversidad colombiana. *La Tekhné*, 88, 11. ISSN 1692-7451
- Aristizábal, C. E., Vargas, A. F., and Alvarado, P. N. (2017). *Determinación numérica de los solventes correctos para la extracción de la pulpa de Café el Ácido Clorogénico, a través del uso de los parámetros de solubilidad de Hansen, evaluación del riesgo y análisis económico*. Cali: Universidad Santiago de Cali.
- Arsalanfar, M., Mirzaei, A. A., Atashi, H., Bozorgzadeh, H. R., Vahid, S., and Zare, A. (2012). An investigation of the kinetics and mechanism of Fischer-Tropsch synthesis on Fe-Co-Mn supported catalyst. *Fuel Processing Technology*, 96, 150-159. 10.1016/j.fuproc.2011.12.018
- Bai, Z., Liu, Q., Lei, J., Li, H., and Jin, H. (2015). A polygeneration system for the methanol production and the power generation with the solar-biomass thermal gasification. *Energy Conversion and Management*, 102, 190-201. 10.1016/j.enconman.2015.02.031
- Balagurumurthy, B., Singh, R., Ohri, P., and Prakash, A. (2015). Recent Advances in Thermo-Chemical Conversion of Biomass. *Recent Advances in Thermo-Chemical Conversion of Biomass*. Elsevier. 10.1016/B978-0-444-63289-0.00006-5
- Bansode, A. and Urakawa, A. (2014). Towards full one-pass conversion of carbon dioxide to methanol and methanol-derived products. *Journal of Catalysis*, 309, 66-70. 10.1016/j.jcat.2013.09.005
- Bentsen, N. S., Felby, C., and Thorsen, B. J. (2014). Agricultural residue production and potentials for energy and materials services. *Progress in Energy and Combustion Science*, 40, 59-73. 10.1016/j.pecs.2013.09.003
- Bergs, D., Merz, J., Delp, a, Joehnck, M., Martin, G., and Schembecker, G. (2013). A Standard Procedure for the Selection of Solvents for Natural Plant Extraction in the Early Stages of Process Development. *Chemical Engineering Technology*, 36(10), 1739-1748. 10.1002/ceat.201300276
- Bilhat Chala, Sajid Latif, J. M. (2015). Potential of by-products from primary coffee processing as source of biofuels. In Tielkes, E. (Ed.) *Management of land use systems for enhanced food security: conflicts, controversies and resolutions* (p. 1). Stuttgart. 10.13140/RG.2.2.21430.96326
- Bozzano, G. and Manenti, F. (2016). Efficient methanol synthesis: Perspectives, technologies and optimization strategies. *Progress in Energy and Combustion Science*, 56, 71-105. 10.1016/j.pecs.2016.06.001
- Buragohain, B., Mahanta, P., and Moholkar, V. S. (2010a). Biomass gasification for decentralized power generation: The Indian perspective. *Renewable and Sustainable Energy Reviews*, 14(1), 73-92. 10.1016/j.rser.2009.07.034
- Buragohain, B., Mahanta, P., and Moholkar, V. S. (2010b). Thermodynamic optimization of biomass gasification for decentralized power generation and Fischer-Tropsch synthesis. *Energy*, 35(6), 2557-2579. 10.1016/j.energy.2010.03.003
- Burniol-figols, A., Cenian, K., Skiadas, I. V., and Gavala, H. N. (2016). Integration of chlorogenic acid recovery and bioethanol production from spent coffee grounds. *Biochemical Engineering Journal*, 116, 54-56. 10.1016/j.bej.2016.04.025
- Carey, D. E., Yang, Y., McNamara, P. J., and Mayer, B. K. (2016). Recovery of agricultural nutrients from biorefineries. *Bioresource Technology*, 215, 186-198. 10.1016/j.biortech.2016.02.093
- Chemat, F., Vian, M. A., and Cravotto, G. (2012). Green extraction of natural products: Concept and principles. *International Journal of Molecular Sciences*, 13(7), 8615-8627. 10.3390/ijms13078615
- Clark, J. H. (2007). Green chemistry for the second generation biorefinery – sustainable chemical manufacturing based on biomass. *Journal of Chemical Technology and Biotechnology*, 82(7), 603-609. 10.1002/jctb.1710
- Clark, J. H., Budarin, V., Deswarte, F. E. I., Hardy, J. J. E., Kerton, F. M., Hunt, A. J., Luque, R., Macquarrie, D. J., Krysztow, M., Rodríguez, A., Samuel, O., Tavener, S. J., White, R. J., and Wilson, A. J. (2006). Green chemistry and the biorefinery: a partnership for a sustainable future. *Green chemistry*, 10, 853-860. 10.1039/b604483m
- Clifford, C. B. (2015). 4.3 Gasification | EGEE 439: Retrieved March 29, 2016. <https://www.e-education.psu.edu/egge439/node/607>
- Cooper, H. W. (2010). Producing electricity and chemicals simultaneously. *Chemical Engineering Progress*, 106(2), 24-32. [https://www.researchgate.net/publication/238723950\\_Producing\\_Electricity\\_and\\_Chemicals\\_Simultaneously](https://www.researchgate.net/publication/238723950_Producing_Electricity_and_Chemicals_Simultaneously)

- Costa, M., La Villetta, M., and Massarotti, N. (2015). Optimal tuning of a thermo-chemical equilibrium model for downdraft biomass gasifiers. *Chemical Engineering Transactions*, 43(2014), 439-444. 10.3303/CET1543074
- Damartzis, T. and Zabaniotou, A. (2011). Thermochemical conversion of biomass to second generation biofuels through integrated process design—A review. *Renewable and Sustainable Energy Reviews*, 15(1), 366-378. 10.1016/j.rser.2010.08.003
- Dávila, J. A., Rosenberg, M., Castro, E., and Cardona, C. A. (2017). Bioresource Technology A model biorefinery for avocado (Persea americana mill.) processing. *Bioresource Technology*, 243, 17-29. 10.1016/j.biortech.2017.06.063
- Demirbas, A. (2009). Biorefineries: Current activities and future developments. *Energy Conversion and Management*, 50(11), 2782-2801. 10.1016/j.enconman.2009.06.035
- Demirbas, A. (2010a). Biorefinery. In *Biorefineries. For Biomass Upgrading Facilities* (pp. 75-92). London, UK: Springer-Verlag. 10.1007/978-1-84882-721-9
- Demirbas, A. (2010b). Biorefinery. In *Biorefineries. For Biomass Upgrading Facilities* (pp. 75-92). London, UK: Springer-Verlag. 10.1007/978-1-84882-721-9
- Departamento Nacional de Planeación, Ministerio de Agricultura y Desarrollo Rural, Ministerio de Ambiente, Vivienda y Desarrollo Territorial, Ministerio de Comercio, Industria y Turismo, Ministerio de Protección Social, Ministerio de Relaciones Exteriores, and Departamento Administrativo de Ciencia Tecnología e Innovación – Colciencias (2011). *Pólítica para el desarrollo comercial de la biotecnología a partir del uso sostenible de la biodiversidad - Conpes 3697*. Bogotá, Colombia: Minciencias. <http://hdl.handle.net/11146/231>
- Ekman, A., Wallberg, O., Joelsson, E., and Börjesson, P. (2013). Possibilities for sustainable biorefineries based on agricultural residues – A case study of potential straw-based ethanol production in Sweden. *Applied Energy*, 102, 299-308. 10.1016/j.apenergy.2012.07.016
- Escalante Hernández, H., Orduz Prada, J., Zapata Lesmes, H., Cardona Ruiz, M., and Duarte Ortega, M. (2010). *Atlas del Potencial Energético de la Biomasa Residual en Colombia*. Bucaramanga, Colombia: Division de publicaciones UIS <http://bdigital.upme.gov.co/handle/001/1058>,
- Esquivel, P., and Jiménez, V. M. (2012). Functional properties of coffee and coffee by-products. *Food Research International*, 46(2), 488-495. 10.1016/j.foodres.2011.05.028
- Folmer, B. (2014). How can science help to create new value in coffee? *Food Research International*, 63, 477-482. 10.1016/j.foodres.2014.03.020
- Gangadharan, P., Zanwar, A., Zheng, K., Gossage, J., and Lou, H. H. (2012). Sustainability assessment of polygeneration processes based on syngas derived from coal and natural gas. *Computers and Chemical Engineering*, 39, 105-117. 10.1016/j.compchemeng.2011.10.006
- Gao, L., Li, H., Chen, B., Jin, H., Lin, R., and Hong, H. (2008). Proposal of a natural gas-based polygeneration system for power and methanol production. *Energy*, 33(2), 206-212. 10.1016/j.energy.2007.10.011
- Garcia, H. J. (2011). *Modelación de la gasificación de biomasa en un reactor de lecho fijo* [Master's thesis, Universidad Nacional de Colombia, Colombia]. <http://bdigital.unal.edu.co/3956/1/291499.2011.pdf>
- García, L. E. (2011). *Obtención de gas combustible a partir de la gasificación de biomasa en un reactor de lecho fijo* [Master's thesis, Universidad Nacional de Colombia, Colombia]. <http://www.bdigital.unal.edu.co/4133/1/291461.2011.pdf>
- George, J., Arun, P., and Muraleedharan, C. (2016). Stoichiometric Equilibrium Model Based Assessment of Hydrogen Generation through Biomass Gasification. *Procedia Technology*, 25, 982-989. 10.1016/j.protcy.2016.08.194
- Ghandi, K. (2014). A Review of Ionic Liquids, their Limits and Applications. *Green and Sustainable Chemistry*, 4(1), 44-53. 10.4236/gsc.2014.41008
- Gil-Montenegro, A. A., Arocha-Morales, J. S., Rojas-Pérez, L. C., and Narváez-Rincón, P. C. (2019). Process simulation for xylitol production from brewer's spent grain in a Colombian biorefinery. Part 1: Xylose production from arabinoxilans extracted by the alkaline pretreatment of BSG. *Ingeniería e Investigación*, 39(1), 15-23. 10.15446/ing.investig.v39n1.70080
- Hamelinck, C. N., and Faaij, A. P. C. (2002). Future prospects for production of methanol and hydrogen from biomass. *Journal of Power Sources* 111(1), 1-22. 10.1016/S0378-7753(02)00220-3
- Haro, P., Ollero, P., Perales, Á. L., and Vidal-Barrero, F. (2013). Potential routes for thermochemical biorefineries. *Biofuels, Bioproducts and Biorefining*, 7, 551-572. 10.1002/bbb
- Heidenreich, S., and Foscolo, P. U. (2015). New concepts in biomass gasification. *Progress in Energy and Combustion Science*, 46, 72-95. 10.1016/j.peccs.2014.06.002
- Hernández A., L. A. (1994). Importancia energética y ambiental de la biomasa en Colombia. *Agronomía Colombiana*, 11(2), 228-235. <https://revistas.unal.edu.co/index.php/agrocol/article/view/28007>
- Herrero, M., and Ibañez, E. (2018). Green extraction processes, biorefineries and sustainability: Recovery of high value-added products from natural sources. *The Journal of Supercritical Fluids*, 134, 252-259. 10.1016/j.supflu.2017.12.002
- Hian, G. G., Saleh, S., and Abdul Samad, N. A. F. (2016). A generic thermodynamic equilibrium model-based framework for biomass gasification processes. *ARP Journal of Engineering and Applied Sciences*, 11(4), 2222-2229. [https://www.researchgate.net/publication/319401943\\_A\\_generic\\_thermodynamic\\_equilibrium\\_model-based\\_framework\\_for\\_biomass\\_gasification\\_processes](https://www.researchgate.net/publication/319401943_A_generic_thermodynamic_equilibrium_model-based_framework_for_biomass_gasification_processes)



- Holmgren, K. M., Berntsson, T., Andersson, E., and Rydberg, T. (2012). System aspects of biomass gasification with methanol synthesis – Process concepts and energy analysis. *Energy*, 45(1), 817-828. 10.1016/j.energy.2012.07.009
- Hughes, S. R., López-Núñez, J. C., Jones, M. A., Moser, B. R., Cox, E. J., Lindquist, M., Galindo-Leva, L. A., Riaño-Herrera, N. M., Rodríguez-Valencia, Nelson, Gast, F., Cedeño, D. L., Tasaki, K., Brown, R. C., Darzins, and Brunner, L. (2014). Sustainable conversion of coffee and other crop wastes to biofuels and bioproducts using coupled biochemical and thermochemical processes in a multi-stage biorefinery concept. *Applied Microbiology and Biotechnology*, 98(20), 8413-8431. 10.1007/s00253-014-5991-1
- ISAGEN. (2005). *Biomasa. In Fuentes no convencionales de generación de electricidad* (pp. 69–88), Bogotá, Colombia: Isagen S.A E.S.P, <https://biblioteca.minminas.gov.co/pdf/FUENTES%20NO%20CONVENCIONALES%20DE%20GENERACION%20C3%93N%20DE%20ELECTRICIDAD%20ISAGEN.pdf>
- Jin, Q., Yang, L., Poe, N., and Huang, H. (2018). Integrated processing of plant-derived waste to produce value-added products based on the biorefinery concept. *Trends in Food Science and Technology*, 74, 119-131. 10.1016/j.tifs.2018.02.014
- Joglekar, S. N., Pathak, P. D., and Mandavgane, S. A. (2019). Process of fruit peel waste biorefinery: a case study of citrus waste biorefinery, its environmental impacts and recommendations. *Environmental Science and Pollution Research*, 26, 34713-34722. s11356-019-04196-0
- Kachrimanidou, V., Kopsahelis, N., Alexandri, M., Strati, A., Gardeli, C., Papanikolaou, S., Komaitis, M., Kookos, I. K., and Koutinas, A. A. (2015). Integrated sunflower-based biorefinery for the production of antioxidants, protein isolate and poly(3-hydroxybutyrate). *Industrial Crops and Products*, 71, 106-113. 10.1016/j.indcrop.2015.03.003
- Kajaste, R. (2014). Chemicals from biomass e managing greenhouse gas emissions in biorefinery production chains - a review. *Journal of Cleaner Production*, 75, 1-10. 10.1016/j.jclepro.2014.03.070
- Kamm, B., and Kamm, M. (2004). Principles of biorefineries. *Applied Microbiology and Biotechnology*, 64(2), 137-145. 10.1007/s00253-003-1537-7
- Kamm, B., Schönicke, P., and Hille, C. (2016). Green biorefinery - Industrial implementation. *Food Chemistry*, 197(B), 1341-1345. 10.1016/j.foodchem.2015.11.088
- Kim, Y. H., Jun, K. W., Joo, H., Han, C., and Song, I. K. (2009). A simulation study on gas-to-liquid (natural gas to Fischer-Tropsch synthetic fuel) process optimization. *Chemical Engineering Journal*, 155(1-2), 427-432. 10.1016/j.cej.2009.08.018
- La Villetta, M., Costa, M., and Massarotti, N. (2017). Modelling approaches to biomass gasification: A review with emphasis on the stoichiometric method. *Renewable and Sustainable Energy Reviews*, 74, 71-88. 10.1016/j.rser.2017.02.027
- Lapkin, A., Adou, E., Mlambo, B. N., Chemat, S., Suberu, J., Collis, A. E. C., Clark, A., and Barker, G. (2014). Integrating medicinal plants extraction into a high-value biorefinery: An example of *Artemisia annua* L. *Comptes Rendus Chimie*, 17(3), 232-241. 10.1016/j.crci.2013.10.023
- Leduc, S., Lundgren, J., Franklin, O., and Dotzauer, E. (2010). Location of a biomass based methanol production plant: A dynamic problem in northern Sweden. *Applied Energy*, 87(1), 68-75. 10.1016/j.apenergy.2009.02.009
- Löffler, K., Gillman, N., Leen, R. W. Van, Schäfer, T., Faaij, A., and Plata, L. G. (2010). the Future of Industrial Biorefineries, 40. Retrieved from [www.weforum.org](http://www.weforum.org)
- Maity, S. K. (2014). Opportunities, recent trends and challenges of integrated biorefinery: Part II. *Renewable and Sustainable Energy Reviews*, 43, 1446-1466. 10.1016/j.rser.2014.08.075
- Maity, S. K. (2015). Opportunities, recent trends and challenges of integrated biorefinery: Part I. *Renewable and Sustainable Energy Reviews*, 43, 1427-1445. 10.1016/j.rser.2014.11.092
- Manenti, F., Adani, F., Rossi, F., Bozzano, G., and Pirola, C. (2016). First-principles models and sensitivity analysis for the lignocellulosic biomass-to-methanol conversion process. *Computers and Chemical Engineering*, 84, 558-567. 10.1016/j.compchemeng.2015.05.012
- Martinez, E., Kok, H., and Ng, S. (2018). Design of biorefinery systems for conversion of corn stover into biofuels using a biorefinery engineering framework. *Clean Technologies and Environmental Policy*, 20(7), 1501-1514. 10.1007/s10098-017-1477-z
- Meerman, J. C., Ramírez, A., Turkenburg, W. C., and Faaij, A. P. C. (2012). Performance of simulated flexible integrated gasification polygeneration facilities, Part B: Economic evaluation. *Renewable and Sustainable Energy Reviews*, 16(8), 6083-6102. 10.1016/j.rser.2012.06.030
- Moazami, N., Wyszynski, M. L., Rahbar, K., Tsolakis, A., and Mahmoudi, H. (2017). A comprehensive study of kinetics mechanism of Fischer-Tropsch synthesis over cobalt-based catalyst. *Chemical Engineering Science*, 171, 32-60. 10.1016/j.ces.2017.05.022
- Molino, A., Chianese, S., and Musmarra, D. (2016). Biomass gasification technology: The state of the art overview. *Journal of Energy Chemistry*, 25, 10-25. 10.1016/j.jechem.2015.11.005
- Moncada, J., Aristizábal, V., and Cardona, C. A. (2016). Design strategies for sustainable biorefineries. *Biochemical Engineering Journal*, 116, 122-134. 10.1016/j.bej.2016.06.009
- Murthy, P. S., and Madhava Naidu, M. (2012). Sustainable management of coffee industry by-products and value addition—A review. *Resources, Conservation and Recycling*, 66, 45-58. 10.1016/j.resconrec.2012.06.005
- Narvaez, a., Chadwick, D., and Kershenbaum, L. (2014). Small-medium scale polygeneration systems: Methanol and power production. *Applied Energy*, 113, 1109-1117. 10.1016/j.apenergy.2013.08.065

- Negro, V., Mancini, G., Ruggeri, B., and Fino, D. (2016). Citrus waste as feedstock for bio-based products recovery: Review on limonene case study and energy valorization. *Bioresource Technology*, 214, 806-815. 10.1016/j.biortech.2016.05.006
- Ng, L. Y., Andiappan, V., Chemmangattuvalappil, N. G., and Ng, D. K. S. (2015). A systematic methodology for optimal mixture design in an integrated biorefinery. *Computers and Chemical Engineering*, 81, 288-309. 10.1016/j.compchemeng.2015.04.032
- Ngan, S. L., How, B. S., Teng, S. Y., Leong, W. D., Loy, A. C. M., Yatim, P., Promentilla, M. A. B., and Lam, H. L. (2020). A hybrid approach to prioritize risk mitigation strategies for biomass polygeneration systems. *Renewable and Sustainable Energy Reviews*, 121, 109679. 10.1016/j.rser.2019.109679
- Pacioni, T. R., Soares, D., Domenico, M. Di, Rosa, M. F., Moreira, R. de F. P. M., and José, H. J. (2016). Bio-syngas production from agro-industrial biomass residues by steam gasification. *Waste Management*, 58, 221-229. 10.1016/j.wasman.2016.08.021
- Parajuli, R., Dalgaard, T., Jørgensen, U., Adamsen, A. P. S., Knudsen, M. T., Birkved, M., Gylling, M., and Schjørring, J. K. (2015). Biorefining in the prevailing energy and materials crisis: a review of sustainable pathways for biorefinery value chains and sustainability assessment methodologies. *Renewable and Sustainable Energy Reviews*, 43, 244-263. 10.1016/j.rser.2014.11.041
- Pereira, E. G., Da Silva, J. N., De Oliveira, J. L., and MacHado, C. S. (2012). Sustainable energy: A review of gasification technologies. *Renewable and Sustainable Energy Reviews*, 16(7), 4753-4762. 10.1016/j.rser.2012.04.023
- Pontzen, F., Liebner, W., Gronemann, V., Rothaemel, M., and Ahlers, B. (2011). CO<sub>2</sub>-based methanol and DME - Efficient technologies for industrial scale production. *Catalysis Today*, 171(1), 242-250. 10.1016/j.cattod.2011.04.049
- Rahimpour, M. R., Jokar, S. M., and Jamshidnejad, Z. (2012). A novel slurry bubble column membrane reactor concept for Fischer-Tropsch synthesis in GTL technology. *Chemical Engineering Research and Design*, 90(3), 383-396. 10.1016/j.cherd.2011.07.014
- Ramirez Rubio, S., Sierra, F. E., and Guerrero, C. A. (2011). Gasification from waste organic materials. *Ingeniería e Investigación*, 31(3), 17-25. <https://revistas.unal.edu.co/index.php/ingeninv/rt/printerFriendly/26374/33638>
- Rauch, R., Hrbek, J., and Hofbauer, H. (2014). Biomass gasification for synthesis gas production and applications of the syngas. *Wiley Interdisciplinary Reviews: Energy and Environment*, 3(4), 343-362. 10.1002/wene.97
- Ravaghi-Ardebili, Z., and Manenti, F. (2015). Unified modeling and feasibility study of novel green pathway of biomass to methanol/dimethylether. *Applied Energy*, 145, 278-294. 10.1016/j.apenergy.2015.02.019
- Riaz, A., Zahedi, G., and Klemeš, J. J. (2013). A review of cleaner production methods for the manufacture of methanol. *Journal of Cleaner Production*, 57, 19-37. 0.1016/j.jclepro.2013.06.017
- Richardson, Y., Drobek, M., Julbe, A., Blin, J., and Pinta, F. (2015). Biomass Gasification to Produce Syngas. In Pandey, A., Stöcker, M., Bhaskar, T., and Sukumaran R. K. (Eds.) *Recent Advances in Thermochemical Conversion of Biomass*. Elsevier. 10.1016/B978-0-444-63289-0.00008-9
- Rodrigues, R., Muniz, A. R., and Marcilio, N. R. (2016). Evaluation of biomass and coal co-gasification of brazilian feedstock using a chemical equilibrium model. *Brazilian Journal of Chemical Engineering*, 33(2), 401-414. 10.1590/0104-6632.20160332s00003479
- Rombaut, N., Tixier, A.-S., Bily, A., and Chemat, F. (2014a). Green extraction processes of natural products as tools for biorefinery. *Biofuels, Bioproducts and Biorefining*, 8(4), 530-544. 10.1002/bbb.1486
- Rombaut, N., Tixier, A.-S., Bily, A., and Chemat, F. (2014b). Green extraction processes of natural products as tools for biorefinery. *Biofuels, Bioproducts and Biorefining*, 8(4), 530-544. 10.1002/bbb.1486
- Romero-García, J. M., Niño, L., Martínez-Patiño, C., Álvarez, C., Castro, E., and Negro, M. J. (2014). Biorefinery based on olive biomass. State of the art and future trends. *Bioresource Technology*, 159, 421-432. 10.1016/j.biortech.2014.03.062
- Ruggiero, M., and Manfreda, G. (1999). An equilibrium model for biomass gasification processes. *Renewable Energy*, 16(1-4), 1106-1109. 10.1016/S0960-1481(98)00429-7
- Sadhukhan, J., Martinez-Hernandez, E., Murphy, R. J., Ng, D. K. S., Hassim, M. H., Siew Ng, K., Yoke Kin W., Md Jaye, F. I., Leung M. Y., and Andiappan, V. (2018). Role of bioenergy, biorefinery and bioeconomy in sustainable development: Strategic pathways for Malaysia. *Renewable and Sustainable Energy Reviews*, 81(Pt. 2), 1966-1987. 10.1016/j.rser.2017.06.007
- Salinas Rios, T., Torres, T. S., Esther, M., Cerrilla, O., Soto Hernández, M., Cruz, A. D., Hernández-Bautista, J., Nava-Cuellar, C., and Huerta, H. V. (2014). Changes in composition, antioxidant content, and antioxidant capacity of coffee pulp during the ensiling process. *Revista Brasileira de Zootecnia*, 43(9), 492-498. 10.1590/S1516-35982014000900006
- Segneanu, A., Czipile, F., and Vlazan, P. (2013). Biomass Extraction Methods. In Darko, M. (Ed.) *Biomass Now – Sustainable Growth and Use* (pp. 390-400). 10.5772/2583
- Singh, R., Krishna, B. B., Mishra, G., Kumar, J., and Bhaskar, T. (2016). Strategies for selection of thermo-chemical processes for the valorisation of biomass. *Renewable Energy*, 98, 1-12. 10.1016/j.renene.2016.03.023
- Steynberg, A. P., Dry, M. E., Davis, B. H., and Breman, B. B. (2004). Chapter 2 - Fischer-Tropsch Reactors. *Studies in Surface Science and Catalysis*, 152, 64-195. 10.1016/S0167-2991(04)80459-2

- Torres-Mancera, M. T., Cordova-López, J., Rodríguez-Serrano, G., Roussos, S., Ascención Ramírez-Coronel, M., Favela-Torres, E., and Saucedo-Castañeda, G. (2011). Enzymatic Extraction of Hydroxycinnamic Acids from Coffee Pulp. *Food Technology and Biotechnology*, 49(3), 369-373. [https://www.researchgate.net/publication/230597690\\_Enzymatic\\_Extraction\\_of\\_Hydroxycinnamic\\_Acids\\_from\\_Coffee\\_Pulp#:~:text=The%20highest%20yield%20of%20extraction,7.2%20and%20caffeic%20acid%202.3](https://www.researchgate.net/publication/230597690_Enzymatic_Extraction_of_Hydroxycinnamic_Acids_from_Coffee_Pulp#:~:text=The%20highest%20yield%20of%20extraction,7.2%20and%20caffeic%20acid%202.3)
- Trivedi, N., Baghel, R. S., Bothwell, J., Gupta, V., Reddy, C. R. K., Lali, A. M., and Jha, B. (2016). An integrated process for the extraction of fuel and chemicals from marine macroalgal biomass. *Scientific Reports*, 6, 1-8. 10.1038/srep30728
- Virmond, E., Rocha, J. D., Moreira, R. F. P. M., and José, H. J. (2013). Valorization of agro-industrial solid residues and residues from biofuel production chains by thermochemical conversion: a review, citing Brazil as a case study. *The Brazilian Journal of Chemical Engineering*, 30(2), 197-229. ISSN 0104-6632
- Yeoh, H. S., Chong, G. H., Azahan, N. M., and Rahman, R. A. (2013). Solubility Measurement Method and Mathematical Modeling in Supercritical Fluids. *Engineering Journal*, 17(3), 67-78. 10.4186/ej.2013.17.3.67
- Yue, D., You, F., and Snyder, S. W. (2014). Biomass-to-bioenergy and biofuel supply chain optimization: Overview, key issues and challenges. *Computers and Chemical Engineering*, 66, 36-56. 10.1016/j.compchemeng.2013.11.016
- Zondervan, E., Nawaz, M., de Haan, A. B., Woodley, J. M., and Gani, R. (2011). Optimal design of a multi-product biorefinery system. *Computers and Chemical Engineering*, 35(9), 1752-1766. 10.1016/j.compchemeng.2011.01.042